

Reliable Solutions

# ZAXIS130

Hitachi Construction Machinery Group  
**LANDCROS**  
Japanese Excellence—Reliable Solutions



## HYDRAULIC EXCAVATOR

Model Code : ZX130-5B

Engine Rated Power : 73.4 kW

Operating Weight : 12 800 - 14 500 kg

Backhoe Bucket ISO Heaped : 0.45 - 0.59 m<sup>3</sup>



# WALK AROUND

## CONTENTS

### 4-5 Performance

Enhanced power, torque and speed ensure the optimum performance of every Hitachi machine.

### 6-7 Productivity

Hitachi excavators have a high impact on efficiency but a low impact on the environment.

### 8-9 Comfort

The cab of the new ZAXIS provides a safer and comfortable work space.

### 10-11 Durability

Hitachi is renowned for manufacturing high-quality machines that can meet the demands of the toughest job sites.

### 12-13 Maintenance

Easily accessible features for cleaning and routine maintenance maximise the availability of the ZAXIS 130.

### 14-15 Hitachi Support Chain

A wide range of after-sales services and support options is available to all our customers.

### 16-21 Specifications

#### Lower fuel costs

The HIOS III hydraulic system reaches higher yields with better fuel consumption than the previous ZAXIS model.

#### Added durability

The strengthened brackets on the boom foot are equipped with bushings to withstand rugged environments. Main frame durability has been increased by enlarging the D-section frame skirt.

#### Faster movement

The arm recirculation cancel and hydraulic boosting systems increase the arm speed during operation.

#### Enhanced lifting performance

Power boost and auto power boost allow machine to perform powerful digging and lifting.



**ZAXIS** *Empower your Vision.*

The design of the new Hitachi ZAXIS 130 excavator is inspired by one aim – empower your vision. It delivers on five key levels: performance, productivity, comfort, durability and reliability. We recognise that fleet owners require high-quality, efficient machines that can work effectively, even in challenging conditions. We also realise that operators need a safer, user-friendly work space, and a machine that can respond to their skills with speed and precision. And to achieve a satisfying result, on time, on budget and to a high standard, we have aimed to maximise availability of the new ZAXIS 130 with easy maintenance features and the Hitachi Support Chain after-sales programme.

#### **Expanded leg room**

The seat and console can slide further back on the new ZAXIS, providing a more comfortable working environment for the operator. The right side console has been ergonomically re-designed.

#### **Ultimate comfort**

The heated air suspension seat is ideal in cold climates and absorbs vibration during operation minimising operator fatigue.

#### **Easily accessible information**

The large multi-function LCD monitor screen is easy to view in bright sunlight or darkness and provides technical data.

#### **Quick and easy service access**

With the new easy-to-use locking mechanism the Dust-Proof indoor filter can be attached and detached quickly.



*NOTE : The photo in this brochure show excavators with optional equipment.*



# PERFORMANCE

The ZAXIS 130 provides the perfect combination of a high level of performance with low fuel consumption. The powerful new model's digging and lifting capabilities have been increased, and its precise and smooth operation is guaranteed by the enhanced hydraulics. It will not only help you to increase production on any earth-moving or general construction site, but also reduce your running costs, thanks to lower fuel consumption and greater efficiency.



# Enhanced power and speed set a new standard on the job site



## Lower fuel with high productivity

Winning tenders and meeting production targets are highly competitive processes for you to develop your business. The choice of construction machinery is of paramount importance and your success relies on the productivity and efficiency of your equipment.

The latest advanced hydraulic and electronic technologies are central to our goal of delivering a significant saving on fuel costs with the new low-emission engine. We are delighted that HIOS III hydraulics allow you to achieve 5% less fuel consumption in PWR mode – than the previous ZAXIS P-mode – while maintaining a high level of productivity at the same time\*.

Furthermore, a reduction of 17% in fuel consumption is also possible in ECO mode\*. This still delivers a relatively high level of productivity using the same amount of fuel.

## Higher level of performance

The success of your business is influenced by the productivity and efficiency of your equipment. Ultimately, your investment in Hitachi construction machinery can help you to meet production targets and compete successfully to win tenders within your market.

The hydraulic boosting system and other hydraulic systems enable the arm roll-in speed to increase when the load is relatively low. Our tried-and-tested power-boost feature has also increased by 5% to deliver an enhanced level of excavating performance and lifting power.

The versatility of the ZAXIS 130 may be evidenced by the attachment support system, with 11 modes that can be registered on the monitor for the easy fitment of different attachments.

\* Based upon typical work pattern collected via Global e-Service

## Key features

- 5% reduction in fuel consumption (PWR mode vs ZX-3 P-mode)\*
- 17% reduction in fuel consumption (ECO mode vs ZX-3 P-mode)\*
- HIOS III hydraulic system – high productivity and lower fuel consumption

- Attachment support system

- Power-boost



# PRODUCTIVITY

Developed to meet the latest European emission regulations, the ZAXIS 130 has been designed to have a smaller impact on the environment, but without reducing its productivity on the job site. Like all new ZAXIS excavators, it benefits from several powerful and innovative features that allow it to operate efficiently and sustainably. It contributes to a cleaner and quieter working environment, and the overall profitability of your business.



# Striking a balance between powerful and sustainable efficiency



## Sustainable efficiency

We are dedicated to the sustainable development of the Hitachi product range, particularly for use on urban job sites. Therefore, the new ZAXIS 130 is a sign of our commitment to minimizing the impact of construction machinery on the environment in compliance with EU emission control Stage IIIB.

The ZAXIS 130 has been fitted with a muffler filter to capture air pollutants, which is automatically burnt thanks to an oxidation catalyst and exhaust temperature control. The variable geometry turbocharger and high volume-cooled EGR (Exhaust Gas Recirculation) also help to reduce nitrous oxide levels.

As well as reducing emissions, the ZAXIS 130's Auto Shut-down helps to prevent fuel wastage and lowers the level of noise in the cab.

In addition, all resin parts on the new ZAXIS excavators are suitable for recycling and clearly marked for ease of use in this process.

## Powerful efficiency

We are also focusing on finding the right balance between people, planet and profit. So, we have assessed the total cost of ownership for the new ZAXIS 130 to ensure that your new machine contributes to the profitability of your business.

The powerful new-generation Stage IIIB-compliant engine in the ZAXIS 130 delivers higher productivity, with greater fuel efficiency and is fitted with state-of-the-art controls throughout all of the components.

Hitachi excavators are renowned for their powerful and reliable performance, especially when there are daily targets and ultimate deadlines to meet on busy job sites. The latest range of ZAXIS models have been designed for increased productivity without burdening the environment through sustainable operations.

## Key features

- Powerful and sustainable
- Stage IIIB-compliant engine
- Muffler filter that captures particulate matter
- Variable geometry turbocharger
- High volume-cooled EGR system
- Environmentally friendly design
- Auto Shut-down – fuel saving for carbon dioxide reduction



# COMFORT

We know that comfort is a key concern for owners and operators of Hitachi construction machinery. That's why the pressurised cab of the new ZAXIS 130 has been designed with the end-user in mind – with excellent all-round visibility, sufficient leg room and a variety of easy-to-use features. Our aim was to provide a safer, spacious and pleasant working environment, so that you can enjoy your work.



# Inside and out, the new ZAXIS excavators lead the way



## From the comfort of the cab

After a long shift on a road construction site or in the quarry, you need to feel ready to enjoy the rest of your day. Hitachi has taken the lead in operator comfort with the new ZAXIS 130, so that you can do just that.

The adjustable air-suspension seat features a new sliding mechanism with the capacity to be moved back further than ever before. The space underneath the monitor has also been expanded to allow for more leg room. The pressurized cab keeps dust and particles from entering.

## All-round visibility

Busy construction sites demand your full attention to avoid unnecessary damage or health and safety issues. The enhanced visibility – especially down the right-hand side of the new ZAXIS – will also save you time (and money), thanks to the latest innovations from Hitachi.

The repositioning of the monitor and door enhances your view, as well as making access to and from the cab much easier. The latest rear-view camera offers a closer view of the counterweight to reduce the blind spot.

## User-friendly functionality

Hitachi has invested heavily in the advanced technology inherent within the new ZAXIS. The power remains firmly at your fingertips thanks to the functionality of the colour monitor and ergonomic controls.

The new multi-function LCD monitor has a large seven-inch screen that is easy to view. It provides a wide range of useful technical information, including a clear indication of the machine's status and settings with multi-lingual support in up to 32 languages. The monitor and ergonomically designed switches have been grouped together within easy reach of your right hand. The proportional switch in the new, optional, auxiliary function lever allows easy control of the front attachment.

## Enjoy your work

Time flies when you're having fun, but we also realise that a happy operator is also a more productive one. That's why we have renewed our focus on providing a relaxed and enjoyable working environment within the cab.

The controls for the AM/FM stereo radio are now adjustable from the colour monitor. An auxiliary terminal has also been added to the sound system, so that you can work efficiently and smoothly to your favourite music via devices such as MP3 players and the inclusion of storage for an MP3 player.

## Key features

- High-spec ROPS pressurised cab
- Enhanced visibility
- New colour LCD monitor
- Easily accessible real-time information
- Expansive leg room
- Ergonomically designed control panel
- Auxiliary terminal and storage for an MP3 player




# DURABILITY

Hitachi has a strong reputation for manufacturing high-quality construction equipment that is capable of working in difficult conditions. Over several decades, we have continuously enhanced the technology incorporated within our machines and developed an unrivalled expertise within the construction industry for reliability and durability. So you can rely on the new ZAXIS 130 to cope with the toughest job sites and most challenging projects.



# Build to conquer tough working environments

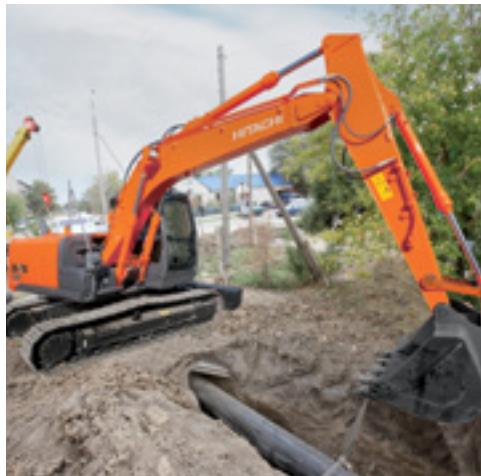

## Durable parts

The new ZAXIS 130 has been designed to operate in the most challenging of working conditions. Tough job sites require reliable machines, which deliver increased levels of availability and productivity. The bottom line is that you will enjoy a lower cost of ownership thanks to the durability of our excavators.

The strengthened boom foot on each new ZAXIS 130 is a good example. The bracket on the boom foot has been equipped with bushings to enhance the durable characteristics and withstand the rigours of long hours in rugged environments.

A filter-type high-performance water separator is provided standard. It captures moisture in fuel, even from fuel which contains a large amount of moisture.

## Reinforced main frame

The D-section frame skirt has been enlarged and the front idler and adjuster cylinder have been reinforced on the ZAXIS 130 for added durability. In addition, mud no longer sticks to the adjuster cylinder.

## Reliable engine

To further improve reliability of the engine the turbo charger has been strengthened and a DLC coating is applied to the nozzle of the fuel injectors. A new double layer fuel filter is adopted, the doubled filtration performance protects the engine and increases durability.

## ROPS-compliant cab

The pressurised and ROPS-compliant CRES V (Center pillar reinforced structure) cab prevents the penetration of dust and protects you from the potential risks of the job site. The Roll-over Protective Structure (ROPS) is designed to protect the operator in the unlikely event of the machine tipping or rolling over.

## Key features

- Proven Hitachi quality
- More than 40 years of expertise
- Improved engine reliability
- Reinforced main frame



# MAINTENANCE

Routine maintenance is essential for keeping unscheduled downtime to an absolute minimum and ensuring the overall reliability of your machine, but it can be difficult finding the time to carry out regular checks on busy construction sites. The new ZAXIS 130 has been designed with time-saving, conveniently accessible features that will make it easy for you to perform routine service and cleaning procedures, so you can get back to work as quickly as possible.



# Keep working for longer thanks to user-friendly accessible features



## Easy access

We have made life easier for you by introducing a range of convenient features integrated within the new ZAXIS excavators. Our engineers have assessed your requirements and integrated a number of time-saving factors for routine maintenance.

Using the technology within the multi-function LCD monitor you can check engine oil volumes and see the warning light that appears when the hydraulic oil and fuel filters are due for replacement. In addition, you can set the routine service schedule to help prevent breakdowns each time the ignition switch is turned on. Severe blockages can be cleared by blowing air through the convenient openable upper cover above the radiator.

From ground level, you can replace the fuel filters, engine oil filter and air cleaner, and other work is aided by non-slip steps for easy access to the upper structure of the machine.

## Easy cleaning

We believe that easy routine maintenance enhances the levels of productivity and availability for your machine. That's why we have designed the ZAXIS 130 with a series of convenient and quick solutions, so that you can enjoy long, trouble-free days on the job site.

The interior anti-dust filter is a good example of these initiatives. It has been placed on the outside of the air conditioning condenser and fuel cooler, and away from the fan so that dust and particles can be caught evenly without them collecting in one place.

The cooling package has been placed in parallel.


## Key features

- Global e-Service monitors muffler filter
- Daily checks from ground level
- Oil volumes checked from the operator's seat
- Quick and easy service access



# SUPPORT CHAIN

As soon as you become a Hitachi customer, you can rely on first-class after-sales service from your authorised dealer. Hitachi provides extensive support to each of the dealers within the Australian network, so that they can ensure your ZAXIS 130 continues to meet your requirements and exceed expectations. To further protect your investment in Hitachi construction machinery, we have introduced the Hitachi Support Chain after-sales programme. This gives you the flexibility to create a tailor-made service plan from the following key-areas, "links" in the chain of service available from Hitachi via your local dealer.

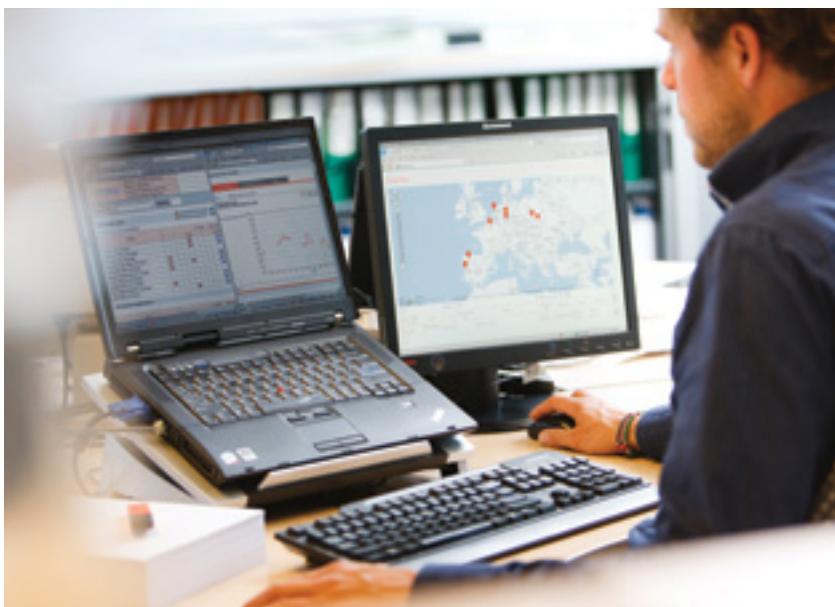

# A flexible after-sales programme created to protect your investment

## Global e-Service

The new ZAXIS excavator is equipped with a GPRS communication system\*. This sends a wide range of machine data to the Hitachi main server. Via the Global e-Service database, you will have remote access to all of this data. All you need is an internet connection and your Global e-Service log-in details.

Global e-Service enables you and your dealer to download and share this data, helping you to remotely manage your fleet. The online facility also helps your dealer to proactively advise you on preventive maintenance and related special offers.

The latest information on the ZAXIS excavator is available 24/7 and includes operational data, such as the number of working hours, fuel consumption figures, working modes and location. This helps you to reduce running costs, plan jobs efficiently and keep up to date with machine maintenance – to ensure optimum performance and minimal downtime.

## Technical support

The professional and highly trained Hitachi service team combines the global expertise and knowledge of Hitachi Construction Machinery with your local language and culture. We take a proactive approach towards customer service by continuously training our dealer personnel, so that the available global knowledge is passed on to each individual technician in our dealer network.

## Extended warranty and service contracts

Every new Hitachi model is covered by a full manufacturer's warranty. However, your ZAXIS excavator may require extra protection due to severe working conditions or to reduce equipment repair costs. To meet these demands, our dealers offer the option of a unique extended warranty programme (HELP – Hitachi Extended Life Program) and comprehensive service contracts – the most effective way to optimize the performance of your new ZAXIS excavator.

## Parts and remanufactured components

Hitachi offers different lines of parts and components to suit your specific needs. In addition to our range of genuine parts, there are other options available:

- If your machines have been working for several years, Hitachi can offer a second line of genuine parts as an attractively priced solution.
- For that highly demanding application or climate, Hitachi provides a line of parts with extra performance.
- When you are looking for an economical solution for preventive replacements, remanufactured components are the best option.

Whatever choice you make, you can be assured of the renowned Hitachi quality and warranty to give you added peace of mind.

Your Hitachi dealer can supply you with more details on each of the above parts lines.



## SUPPORT CHAIN

\* The GPRS communication system is standard equipment for new ZAXIS excavators, however, the availability of the communication system depends on licensing regulations in your country. Please contact your Hitachi dealer for more information or to apply for a Global e-Service account.

## Key features

- Check each of your machines from your office – 24/7
- Have a remote insight into fuel consumption
- Check the current and previous locations and movements of your machine(s)

- See maintenance status and items due for renewal on each of your machines
- Receive e-mail notifications for any machine alerts, unexpected movements and so on

# SPECIFICATIONS

## ENGINE

Model	Isuzu AM-4JJ1X
Type	4-cycle water-cooled, common rail direct injection
Aspiration	Variable geometry turbocharged, intercooled, cooled EGR
After treatment	Muffler filter
No. of cylinders	4
Rated power	
ISO 14396	77.0 kW at 2 000 min <sup>-1</sup>
ISO 9249, net	73.4 kW at 2 000 min <sup>-1</sup>
EEC 80/1269, net	73.4 kW at 2 000 min <sup>-1</sup>
SAE J1349, net	73.4 kW at 2 000 min <sup>-1</sup>
Maximum torque	374 Nm at 1 600 min <sup>-1</sup>
Piston displacement	2.999 L
Bore and stroke	95.4 mm x 104.9 mm
Batteries	2 x 12 V / 58 Ah

## UPPERSTRUCTURE

### Revolving Frame

D-section frame for resistance to deformation.

### Swing Device

Axial piston motor with planetary reduction gear is bathed in oil. Swing circle is single-row. Swing parking brake is spring-set/hydraulic-released disc type.

Swing speed ..... 13.3 min<sup>-1</sup>

Swing torque ..... 34 kNm

### Operator's Cab

Independent spacious cab, 1 005 mm wide by 1 675 mm high, conforming to ISO\* Standards.

\* International Organization for Standardization

## UNDERCARRIAGE

### Tracks

Heat-treated connecting pins with dirt seals. Hydraulic (grease) track adjusters with shock-absorbing recoil springs.

### Numbers of Rollers and Shoes on Each Side

Upper rollers	1
Lower rollers	7
Track shoes	44
Track guard	1

### Travel Device

Each track driven by 2-speed axial piston motor. Parking brake is spring-set/hydraulic-released disc type.

Automatic transmission system: High-Low.

Travel speeds ..... High : 0 to 5.5 km/h  
Low : 0 to 3.3 km/h

Maximum traction force ... 117 kN

Gradeability ..... 70% (35 degree) continuous

## SOUND LEVEL

Sound level in cab according to ISO 6396 ..... LpA 69 dB(A)  
External sound level according to ISO 6395 and  
EU Directive 2000/14/EC ..... LwA 98 dB(A)

## SERVICE REFILL CAPACITIES

Fuel tank	280 L
Engine coolant	20.0 L
Engine oil	17.0 L
Swing device	3.20 L
Travel device (each side)	4.00 L
Hydraulic system	170 L
Hydraulic oil tank	70.0 L

## HYDRAULIC SYSTEM

### Hydraulic Pumps

Main pumps	2 variable displacement axial piston pumps
Maximum oil flow	2 x 117 L/min
Pilot pump	1 gear pump
Maximum oil flow	33.6 L/min

### Hydraulic Motors

Travel	2 variable displacement axial piston motors
Swing	1 axial piston motor

### Relief Valve Settings

Implement circuit	34.3 MPa
Swing circuit	32.3 MPa
Travel circuit	34.3 MPa
Pilot circuit	4.00 MPa
Power boost	36.3 MPa

### Hydraulic Cylinders

	Quantity	Bore	Rod diameter
Boom	2	105 mm	70 mm
Arm	1	115 mm	80 mm
Bucket	1	100 mm	70 mm

## BUCKET AND ARM DIGGING FORCE

		ZAXIS 130		
Arm length		2.10 m	2.52 m	3.01 m
Bucket digging force* ISO			104 kN	
Bucket digging force* SAE			91 kN	
Arm crowd force* ISO		77 kN	69 kN	61 kN
Arm crowd force* SAE		74 kN	67 kN	60 kN

\* At power boost


## WEIGHTS AND GROUND PRESSURE

### Operating Weight and Ground Pressure

Shoe type	Shoe width	Arm length	ZAXIS 130		ZAXIS 130 with blade (optional)	
			kg	kPa	kg	kPa
Triple grouser	500 mm	2.10 m	12 800	40	13 900	43
		2.52 m	12 800	40	14 000	44
		3.01 m	12 900	40	14 000	44
	600 mm	2.10 m	13 100	34	—	—
		2.52 m	13 100	34	—	—
		3.01 m	13 200	34	—	—
	700 mm	2.10 m	13 200	29	—	—
		2.52 m	13 300	29	—	—
		3.01 m	13 400	30	—	—
Pad crawler	500 mm	2.10 m	12 900	40	14 000	43
		2.52 m	12 900	40	14 100	44
		3.01 m	13 000	40	14 100	44
Rubber pad	500 mm	2.10 m	13 300	41	14 400	45
		2.52 m	13 300	41	14 500	45
		3.01 m	13 400	41	14 500	45

Including 0.50 m<sup>3</sup> (ISO heaped), bucket weight (410 kg) and counterweight (3 000 kg).

### Basic Machine Weight and Overall Width



Excluding front end attachment, fuel, hydraulic oil and coolant etc. Including counterweight.

		ZAXIS 130		ZAXIS 130 with blade (optional)	
Shoe type	Shoe width	Weight	Overall width	Weight	Overall width
Triple grouser	500 mm	10 100 kg	2 490 mm	11 380 kg	2 490 mm
	600 mm	10 400 kg	2 590 mm	—	—
	700 mm	10 600 kg	2 690 mm	—	—
Pad crawler	500 mm	10 200 kg	2 490 mm	11 400 kg	2 490 mm
Rubber pad	500 mm	10 600 kg	2 490 mm	11 800 kg	2 490 mm

### Components Weight

		Weight
Counterweight		3 000 kg
Boom 4.60 m (with arm cylinder and boom cylinder)		1 220 kg
Arm 2.10 m (with bucket cylinder)		550 kg
Arm 2.52 m (with bucket cylinder)		600 kg
Arm 3.01 m (with bucket cylinder)		670 kg
Bucket 0.50 m <sup>3</sup>		410 kg

## BACKHOE ATTACHMENTS

Boom and arms are of welded, box-section design. 4.60 m boom, and 2.10 m, 2.52 m and 3.01 m arms are available.

Bucket is of welded steel structure. Side clearance adjust mechanism provided on the bucket joint bracket.

### Buckets

Capacity	Width		No. Of teeth	Weight	Recommendation		
					ZAXIS 130		
ISO heaped	Without side cutters	With side cutters			Arm 2.10 m	Arm 2.52 m	Arm 3.01 m
0.45 m <sup>3</sup>	800 mm	920 mm	5	390 kg	◎	◎	○
0.50 m <sup>3</sup>	890 mm	1 010 mm	5	410 kg	◎	◎	○*
0.59 m <sup>3</sup>	950 mm	1 070 mm	5	430 kg	◎	○	—

\* With 700 mm shoes only


◎ Suitable for materials with density of 2 000 kg/m<sup>3</sup> or less

○ Suitable for materials with density of 1 600 kg/m<sup>3</sup> or less

— Not applicable

# SPECIFICATIONS


## WORKING RANGES

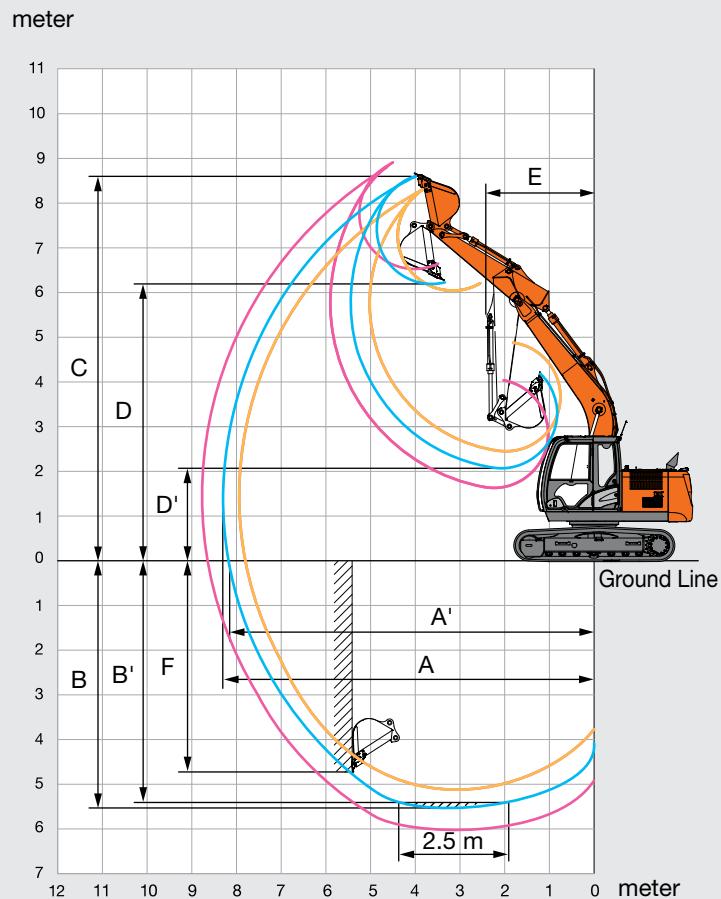

ZAXIS 130			
Arm length	2.10 m	2.52 m	3.01 m
A Max. digging reach	7 940	8 300	8 770
A' Max. digging reach (on ground)	7 800	8 170	8 650
B Max. digging depth	5 120	5 540	6 030
B' Max. digging depth (2.5 m level)	4 870	5 310	5 840
C Max. cutting height	8 400	8 600	8 930
D Max. dumping height	5 990	6 190	6 520
D' Min. dumping height	2 490	2 070	1 610
E Min. swing radius	2 350	2 400	2 620
F Max. vertical wall digging depth	4 450	4 750	5 220


Excluding track shoe lug

## DIMENSIONS

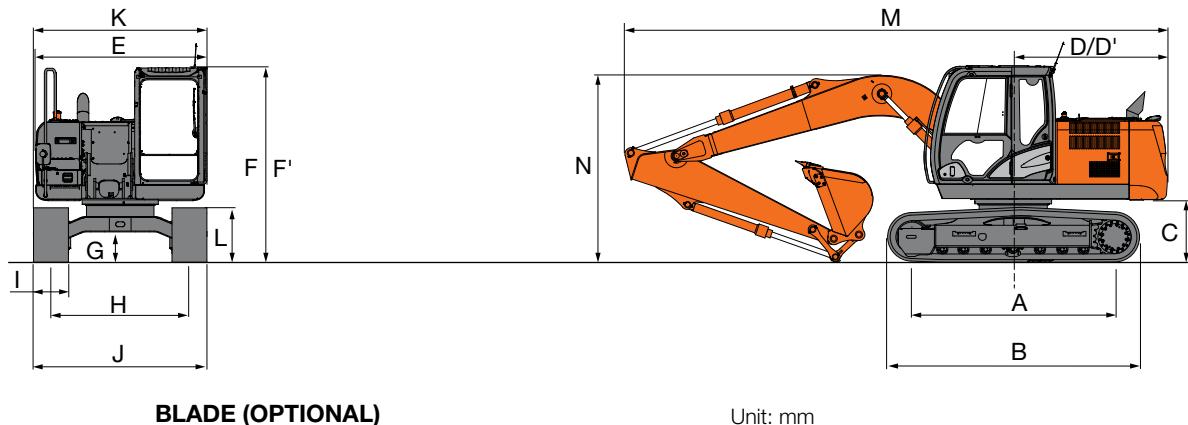

BLADE (OPTIONAL)

Unit: mm

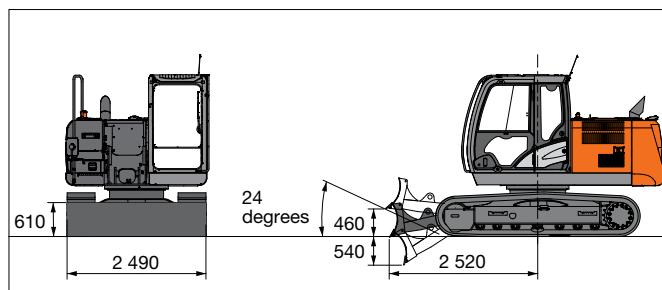

Unit: mm

	ZAXIS 130	ZAXIS 130 with blade (optional)
A Distance between tumblers	2 880	
B Undercarriage length	3 580	
* C Counterweight clearance	840	
D Rear-end swing radius	2 190	
D' Rear-end length	2 190	
E Overall width of upperstructure	2 460	
F Overall height of cab	2 790	
F' Over height of upperstructure	2 790	
* G Min. ground clearance	410	
H Track gauge	1 990	
I Track shoe width	G 500	
J Undercarriage width	2 490	
K Overall width	2 490	
* L Track height with triple grouser shoes	780	
M Overall length		
Arm with 2.10 m	7 700	8 030
Arm with 2.52 m	7 700	8 030
** Arm with 3.01 m	7 710	8 040
N Overall height of boom		
Arm with 2.10 m	2 630	
Arm with 2.52 m	2 750	
** Arm with 3.01 m	2 740	


\* Excluding track shoe lug

G: Triple grouser shoe

\*\* For transport pin position

# LIFTING CAPACITIES

- Notes: 1. Ratings are based on ISO 10567.  
 2. Lifting capacity does not exceed 75% of tipping load with the machine on firm, level ground or 87% full hydraulic capacity.  
 3. The load point is the center-line of the bucket pivot mounting pin on the arm.  
 4. \*Indicates load limited by hydraulic capacity.  
 5. 0 m = Ground.



A: Load radius  
 B: Load point height  
 C: Lifting capacity

For lifting capacities, subtract bucket and quick hitch weight from lifting capacities without bucket.

## ZAXIS 130

Conditions	Load point height m	Load radius										At max. reach			
		1.5 m		3.0 m		4.5 m		6.0 m		7.5 m					
														meter	
Boom 4.60 m Arm 2.10 m Counterweight 3 000 kg Shoe 500 mm	4.5					*3 990	3 870						*2 790	2 480	5.96
	3.0			*6 780	*6 780	*4 750	3 690	3 420	2 410				*2 760	2 120	6.52
	1.5					5 110	3 490	3 330	2 330				2 830	1 990	6.71
	0 (Ground)			*5 620	*5 620	4 960	3 350	3 270	2 270				2 900	2 030	6.54
	-1.5	*4 890	*4 890	*8 890	6 050	4 920	3 310	3 270	2 270				3 270	2 270	6.00
	-3.0			*7 280	6 180	*4 940	3 390						*4 220	2 990	4.95
Boom 4.60 m Arm 2.52 m Counterweight 3 000 kg Shoe 500 mm	4.5					*3 590	*3 590	*3 360	2 480				*2 320	2 250	6.36
	3.0			*5 930	*5 930	*4 390	3 730	3 430	2 420				*2 310	1 940	6.90
	1.5			*8 090	6 300	5 140	3 500	3 330	2 330				*2 440	1 830	7.07
	0 (Ground)			*6 520	6 010	4 950	3 340	3 250	2 250				2 660	1 850	6.92
	-1.5	*4 660	*4 660	*9 190	5 970	4 880	3 270	3 220	2 220				2 950	2 050	6.40
	-3.0	*8 560	*8 560	*7 890	6 070	4 930	3 310						3 750	2 580	5.44
Boom 4.60 m Arm 3.01 m Counterweight 3 000 kg Shoe 500 mm	6.0					*3 110	*3 110	*3 160	2 510				*2 140	2 140	5.97
	4.5					*4 920	*4 920	*3 930	3 780	3 450	2 430		*2 000	1 990	6.88
	3.0			*7 740	6 440	*4 990	3 530	3 330	2 330				*1 990	1 740	7.38
	1.5			*7 120	6 000	4 950	3 320	3 230	2 230				*2 090	1 650	7.54
	0 (Ground)			*7 120	6 000	4 950	3 320	3 230	2 230				*2 300	1 660	7.39
	-1.5	*4 120	*4 120	*8 910	5 890	4 840	3 230	3 170	2 180				2 610	1 800	6.92
Boom 4.60 m Arm 3.01 m Counterweight 3 000 kg Shoe 500 mm	-3.0	*7 180	*7 180	*8 440	5 940	4 840	3 230	3 200	2 210				3 180	2 190	6.04
	-4.5			*6 120	*6 120	*3 780	3 380						*3 770	3 380	4.50

## ZAXIS 130 BLADE (ABOVE GROUND)

Conditions	Load point height m	Load radius										At max. reach			
		1.5 m		3.0 m		4.5 m		6.0 m		7.5 m					
														meter	
Boom 4.60 m Arm 2.10 m Counterweight 3 000 kg Shoe 500 mm	4.5					*3 990	*3 990						*2 790	2 710	5.96
	3.0			*6 780	*6 780	*4 750	4 020	3 370	2 640				*2 760	2 320	6.52
	1.5					5 050	3 810	3 290	2 560				2 790	2 180	6.71
	0 (Ground)			*5 620	*5 620	4 900	3 670	3 220	2 500				2 860	2 230	6.54
	-1.5	*4 890	*4 890	*8 890	6 620	4 860	3 640	3 220	2 500				3 220	2 500	6.00
	-3.0			*7 280	6 750	4 940	3 710						*4 220	3 280	4.95
Boom 4.60 m Arm 2.52 m Counterweight 3 000 kg Shoe 500 mm	4.5					*3 590	*3 590	*3 360	2 710				*2 320	*2 320	6.36
	3.0			*5 930	*5 930	*4 390	4 050	3 390	2 650				*2 310	2 130	6.90
	1.5			*8 090	6 870	5 070	3 820	3 290	2 550				*2 440	2 010	7.07
	0 (Ground)			*6 520	*6 520	4 890	3 660	3 200	2 480				2 620	2 040	6.92
	-1.5	*4 660	*4 660	*9 190	6 540	4 820	3 600	3 170	2 450				2 910	2 250	6.40
	-3.0	*8 560	*8 560	*7 890	6 640	4 860	3 630						3 700	2 840	5.44
Boom 4.60 m Arm 3.01 m Counterweight 3 000 kg Shoe 500 mm	6.0					*3 110	*3 110	*3 160	2 740				*2 140	*2 140	5.97
	4.5					*4 920	*4 920	*3 930	3 410	3 260			*2 000	*2 000	6.88
	3.0			*7 740	7 010	*4 990	3 850	3 290	2 550				*1 990	1 920	7.38
	1.5			*7 120	6 570	4 880	3 650	3 180	2 450				*2 090	1 820	7.54
	0 (Ground)			*7 120	6 460	4 770	3 550	3 130	2 400				*2 300	1 830	7.39
	-1.5	*4 120	*4 120	*8 910	6 460	4 770	3 550	3 130	2 430				2 570	1 990	6.92
Boom 4.60 m Arm 3.01 m Counterweight 3 000 kg Shoe 500 mm	-3.0	*7 180	*7 180	*8 440	6 510	4 780	3 550	3 160	2 430				3 130	2 410	6.04
	-4.5			*6 120	*6 120	*3 780	3 710						*3 770	3 700	4.50

## ZAXIS 130 BLADE (ON GROUND)

Conditions	Load point height m	Load radius										At max. reach			
		1.5 m		3.0 m		4.5 m		6.0 m		7.5 m					
														meter	
Boom 4.60 m Arm 2.10 m Counterweight 3 000 kg Shoe 500 mm	4.5					*3 990	*3 990						*2 790	2 710	5.96
	3.0			*6 780	*6 780	*4 750	4 020	*4 030	2 640				*2 760	2 320	6.52
	1.5					5 660	3 810	*4 370	2 560				2 900	2 180	6.71
	0 (Ground)			*5 620	*5 620	*6 170	3 670	*4 560	2 500				*3 260	2 230	6.54
	-1.5	*4 890	*4 890	*8 890	6 620	*6 040	3 640	*4 030	2 500				*4 020	2 500	6.00
	-3.0			*7 280	6 750	*4 940	3 710						*4 220	3 280	4.95
Boom 4.60 m Arm 2.52 m Counterweight 3 000 kg Shoe 500 mm	4.5					*3 590	*3 590	*3 360	2 710				*2 320	*2 320	6.36
	3.0			*5 930	*5 930	*4 390	4 050	3 790	2 650				*2 310	2 130	6.90
	1.5			*8 090	6 870	*5 380	3 820	*4 190	2 550				*2 440	2 010	7.07
	0 (Ground)			*6 520	*6 520	*6 040	3 660	*4 490	2 480				*2 730	2 040	6.92
	-1.5	*4 660	*4 660	*9 190	6 540	*6 110	3 600	*4 420	2 450				*3 320	2 250	6.40
	-3.0	*8 560	*8 560	*7 890	6 640	*5 360	3 630						*4 100	2 840	5.44
Boom 4.60 m Arm 3.01 m Counterweight 3 000 kg Shoe 500 mm	6.0					*3 110	*3 110	*3 160	2 740				*2 140	*2 140	5.97
	4.5					*4 920	*4 920	*3 930	3 410	3 260			*2 000	*2 000	6.88
	3.0			*7 740	7 010	*4 990	3 850	*3 450	2 550				*1 990	1 920	7.38
	1.5			*7 120	6 570	*5 820	3 650	*4 350	2 450				*2 090	1 820	7.54
	0 (Ground)			*7 120	6 570	*5 820	3 650	*4 350	2 450		</				

# EQUIPMENT

● : Standard equipment

○ : Optional equipment

ENGINE	CAB	MONITOR SYSTEM	UNDERCARRIAGE
Air cleaner double filters	All-weather sound suppressed steel cab	Alarm buzzers: overheat, engine oil pressure, overload	Blade
Alternator 50 A	AM-FM radio	Alarms: overheat, engine warning, engine oil pressure, alternator, minimum fuel level, hydraulic filter restriction, air filter restriction, work mode, overload, etc	Bolt-on sprocket
Auto idle system	Ashtray	Display of meters: water temperature, hour, fuel rate, clock	Reinforced track links with pin seals
Auto shut-down control	Auto control air conditioner	Other displays: work mode, auto-idle, glow, rearview monitor, operating conditions, etc	Shoe : 500 mm triple grouser
Cartridge-type engine oil filter	Auxiliary function lever (breaker or assist)	32 languages selection	Travel motor covers
Cartridge-type fuel main filter	AUX. terminal and storage		Travel parking brake
Cartridge-type fuel pre-filter	Cigarette lighter 24 V		Track undercover
Dust-proof indoor net	CRES V (center pillar reinforced structure) cab		Upper and lower rollers
Dry-type air filter with evacuator valve (with air filter restriction indicator)	Drink holder with hot & cool function		1 track guard (each side) and hydraulic track adjuster
ECO/PWR mode control	Electric double horn		2 track guards (each side) and hydraulic track adjuster
Electrical fuel feed pump	Engine shut-off switch		4 tie down brackets
Engine oil drain coupler	Equipped with reinforced, tinted (green color) glass windows		
Engine warm-up device	Evacuation hammer		
Fan guard	Floor mat		
Fuel cooler	Footrest		
High performance water separator	Front guard (lower mesh type)		
Isolation-mounted engine	Front guard (upper mesh type)		
Maintenance free pre-cleaner	Front window washer		
Muffler filter	Glove compartment		
Radiator, oil cooler and intercooler	Hot & cool box		
Radiator reserve tank	Intermittent windshield wipers		
HYDRAULIC SYSTEM		LIGHTS	FRONT ATTACHMENTS
Auto power lift	Key cylinder light	Additional boom light with cover	Arm (lower reinforced)
Control valve with main relief valve	Laminated round glass window	Additional cab roof front 2 lights	Casted bucket link A
Extra port for control valve	LED room light with door courtesy	Additional cab roof rear 1 light	Centralized lubrication system
Full-flow filter	Mesh guard (cab top)	2 working lights	Dirt seal on all bucket pins
High mesh full flow filter with restriction indicator	OPG front guard Level II (ISO10262) compliant cab		Flanged pin
Hose rupture valve for arm	OPG top guard Level II (ISO10262) compliant cab		HN bushing
Hose rupture valve for boom	Pilot control shut-off lever		Reinforced link B
Pilot filter	Power outlet 12 V		Reinforced resin thrust plate
Power boost	Rear tray		WC (tungsten-carbide) thermal spraying
Suction filter	Retractable seat belt		
Variable relief valve for breaker & crusher	ROPS (ISO12117-2) compliant cab		
Work mode selector	Rubber radio antenna		
	Seat : air suspension seat with heater		
	Seat adjustment part : backrest, armrest, height and angle, slide forward / back		
	Short wrist control levers		
	Sun visor (front window/side window)		
	Transparent roof with slide curtain		
	Windows on front, upper, lower and left side can be opened		
	2 speakers		
	4 fluid-filled elastic mounts		
UPPER STRUCTURE			ATTACHMENTS
			Accessories for 2 speed selector
			Additional pump (30 L/min)
			Assist piping
			Attachment basic piping
			Breaker and crusher piping
			Pilot accumulator
MISCELLANEOUS			
			Battery disconnect switch
			Global e-Service
			Level indicator
			Lockable fuel refilling cap
			Lockable machine covers
			Onboard information controller
			Satellite communication system unit
			Skid-resistant, plates and handrails
			Standard tool kit
			Swing alarm
			Travel alarm
			Travel direction mark on track frame

Standard and optional equipment may vary by country, so please consult your Hitachi dealer for details.

## MEMO

## MEMO



**Built on the foundation of superb technological capabilities, Hitachi Construction Machinery is committed to providing leading-edge solutions and services to contribute as a reliable partner to the business of customers worldwide.**



---

## Hitachi Environmental Vision 2025

---

The Hitachi Group (the Group) released the Environmental Vision 2025 to reduce their annual carbon dioxide emissions. While the Group is committed to global production, the focus is to reduce the environmental impact of all products, and fulfil a sustainable society by tackling three goals — prevention of global warming, recycling of resources, and enhancing the ecosystem.

### Reducing Environmental Impact by the New ZAXIS

Hitachi reduces carbon emissions for global warming prevention according to LCA\*. The new ZAXIS exemplify the Group's commitment to the environment through features, such as the new standard mode which optimizes fuel efficiency. Hitachi has long been committed to the recycling of components, such as aluminium parts in radiators and oil coolers. Resin parts are marked for recycling.

\*Life Cycle Assessment – ISO 14040

Prior to operating this machine, including the satellite communication system, in a country other than the country of its intended use, it may be necessary to make modifications to the machine to ensure it complies with the local regulatory standards (including safety standards) and legal requirements of that particular country. Please do not export or operate this machine outside the country of its intended use until such compliance has been confirmed. Please contact your Hitachi dealer regarding compliance. These specifications are subject to change without notice.

Illustrations and photos show the standard models, and may or may not include optional equipment, accessories, customer installed and modified parts, optional parts and all standard equipment with some differences in colour and features.

Before use, read and understand the Operator's Manual for proper operation.



KS-EN335AU