

ZAXIS-7 series

HITACHI

Reliable Solutions

ZAXIS150/155W

Hitachi Construction Machinery Group

LANDCROS

Japanese Excellence—Reliable Solutions



WHEELED EXCAVATOR

Model code : ZX150W-7

Engine rated power : 105 kW (ISO 14396) /
100 kW (ISO 9249)

Operating weight : 15 600 – 17 400 kg

Bucket ISO heaped : 0.45 – 0.59 m³

Model code : ZX155W-7

Engine rated power : 105 kW (ISO 14396) /
100 kW (ISO 9249)

Operating weight : 16 200 – 17 500 kg

Bucket ISO heaped : 0.45 – 0.59 m³



YOU'RE IN CONTROL

You're at the heart of Hitachi's design for its latest range of excavators. To continuously improve on previous generation machines we've focused on enhancing your experience in the cab as an operator.

We've considered the challenges you face as the owner of a successful business. And we've zoomed in on the ways in which we can support you over the life cycle of your machine.

By putting you at the heart of the Zaxis-7 range, we invite you to take control – over your workspace and your fleet. And by working in partnership, we will help you to create your vision.



INSIDE



4. Complete Control
In control of your assets



6. Increase your safety
Be in control of your environment



8. Boost your uptime
Improve your profit



11. Control Zone
Feel the difference



12. Get More from your machine
In control of your performance



14. Specifications
Know your machine



COMPLETE CONTROL

The new Zaxis-7 range of medium excavators puts you firmly in control, so you can feel assured of your machine's performance and supported by the technological expertise and services that Hitachi provides.



The expanded cab interior provides a more comfortable working environment.



Integrated console and seat suspension gives a greater sense of control, and helps to reduce fatigue.



Visibility of the job site is excellent thanks to the Aerial Angle® camera system and new LCD monitor.



Sensors monitor oil continuously and contribute to preventative maintenance, helping to reduce downtime.



ConSite Pocket app allows you to manage and monitor your fleet remotely.



Options such as Hitachi ground engaging tools enable you to enhance the performance of your excavator.



Improved access to components ensures maintenance is quick and easy.



The new HIOS-V hydraulic system reduces fuel consumption and increases efficiency.



The ECO gauge on the monitor indicates how to lower fuel consumption and reduce costs.



Your ability to work safely is vital, not only for your own wellbeing, but also for the successful completion of any project. To protect yourself and your machine from potential hazards, the new Hitachi Zaxis-7 excavators give you a superior view of your surroundings, so you can see the job site from all angles.

The visibility you enjoy from the cab includes an exceptional 270-degree bird's-eye view with the Aerial Angle camera system. You can choose from six image options to view the machine's immediate environment, which enables you to control your own safety – as well as that of those around you. Visibility through the cab's front window is also improved by the slim steering column (with wider adjustment angle) and smaller steering wheel.

To help you to work more confidently and efficiently, even in the most challenging of conditions, Zaxis-7 excavators are fitted with some impressive new features. From the LED work lights and the windscreen wiper with an increased sweeping area, wider heated mirrors, to the large reflective strips on the counterweight and optional roller sunshades, you'll have the visibility you need when it matters most.

Attention to detail is also fundamental to a safe working environment – and the repositioning of the pilot shutoff lever is a perfect example. It is now within easy reach to prevent any unintentional actions. The parking brake also works with the pilot shutoff lever for added safety and convenience.



The lower first step makes entering the cab safer and easier.



Choose between different image layouts to suit your working environment.



Wider wiper design provides greater visibility.



LED work lights improve visibility in challenging conditions.

BOOST YOUR UPTIME

Completing a project on time and on budget depends on the ability of your construction equipment to perform all day, every day. That's why Hitachi owners have profited from generations of ultra-reliable and durable machinery – and the Zaxis-7 range is no exception.

The latest Hitachi wheeled excavators have been built to last, so that you can remain in complete control of your assets. They have been tested rigorously and continuously at dedicated facilities in Japan with the goal of significantly boosting your uptime.

As a result, a wide range of durable new components have been fitted to the latest Stage-V compliant machines – even down to the detail of the rigidity of the door hinges. The reliable new single-piece undercarriage benefits from greater oscillation of the axles, enhanced outrigger hydraulics, reduced risk of oil leakages, and several other improvements. Now standard on our Zaxis-7 range is a high-performance hydraulic filter to capture any dust in the hydraulic oil and help to reduce running costs.

Downtime is prevented by the durable after-treatment system, and also minimised by the priority given to easy maintenance and cleaning – saving you time and money. Peace of mind comes from such features as the two-way disconnect switch. This makes it possible to shut down power without resetting data on the monitor and prevents the battery from discharging during welding.



Optional auto-greasing system saves time.



Fenders on the undercarriage protect the upper structure and lights from dirt, keeping the machine clean.



Maintenance is easy at ground level.



Designed for durability and easy maintenance, Zaxis-7 excavators increase uptime and reduce the total cost of ownership.



1

2

18

3

4

17

5

16

15

14

6

7

13

8

9

HITACHI

10

11

12

CONTROL ZONE

Enhanced comfort and safety features are at your fingertips in the refined cab of Zaxis-7 excavators, giving you the power to perform productively, with ease and reduced fatigue.

- 1 **Increased sweeping area of wide view wiper** enhances visibility in difficult working conditions.
- 2 **Air conditioning and audio** are easily controlled via the monitor.
- 3 **Low-reflective colour 8" LCD monitor** is easy to view and navigate.
- 4 **USB socket and smartphone holder** helps you stay connected.
- 5 **Drinks holder** is easy to detach for cleaning.
- 6 **Additional joystick controls** for effortless operation.
- 7 **Ergonomic design** gives you convenient access to controls.
- 8 **Bluetooth®** for hands-free calls and **DAB+** radio for music while you work.
- 9 **Multifunctional control panel** makes operation easier.
- 10 **Improved sound isolation** makes this one of the quietest cabs in the market.
- 11 **User-friendly storage space** keeps your workspace tidy and clutter-free.
- 12 **Coat hooks** take care of your personal belongings.
- 13 **New blade and outrigger lever** provides fingertip control and is within easy reach.
- 14 **Integrated console and seat suspension** gives a greater sense of control and helps to reduce fatigue.
- 15 **One-touch adjustment lever for console** so you can work comfortably in the optimum position.
- 16 **Increased legroom** creates a more spacious cab.
- 17 **Front visibility** is improved by the slim steering column (with wider adjustment angle) and smaller steering wheel.
- 18 **Auto working brake** helps to reduce fatigue.



Operation is easy with ergonomically designed controls and switches.



Bluetooth® connection for hands-free calls while you work.

GET MORE FROM YOUR MACHINE

Designed to work in perfect harmony with your machine, Hitachi's buckets and ground engaging tools (GET) will increase your profit by maximising productivity and uptime. Manufactured to the same high standards as all Hitachi construction equipment, they offer unrivalled reliability and exceptional performance.

Buckets

You can increase the versatility of your excavator by choosing the right bucket for the job. For loading light materials or heavy-duty work, Hitachi buckets can be customised to meet your needs. You have a wide range of options to choose from – including digging buckets and ditch-cleaning buckets in GD and HD versions, with different capacities and widths – and quick coupler connections such as CW, pin grabber and S-coupling are also available.

Ground engaging tools

You can enhance the digging power and productivity of your excavator with Hitachi GET. Quick and safe to install and replace, they fit precisely to your attachments and can be tailored to suit the task. Using Hitachi GET can reduce your maintenance costs and downtime, lower fuel consumption and enhance the overall performance of your machine.



Attachments can be customised to suit the application.



An optional trailer support package is available for added convenience and versatility.



Hitachi GET include teeth and reliable adapters to ensure a precise fit.
*Not available in all markets



SPECIFICATIONS

ENGINE	
Model	DEUTZ TCD4.1L4
Type	4-cycle water-cooled, common rail direct injection
Aspiration	Turbocharged with waste gate, intercooled, cooled EGR
Aftertreatment	DOC+DPF+SCR system
No. of cylinders	4
Rated power	
ISO 14396 : 2002 gross	105 kW at 2 000 min ⁻¹
ISO 9249 : 2007 net	100 kW at 2 000 min ⁻¹
Maximum torque	550 Nm at 1 600 min ⁻¹
Piston displacement	4.038 L
Bore and stroke	101 mm x 126 mm
Batteries	2 x 12 V

HYDRAULIC SYSTEM			
Hydraulic Pumps			
Main pumps	2 variable displacement axial piston pumps		
Maximum oil flow	2 x 117 L/min		
Pilot pump	1 gear pump		
Maximum oil flow	23.4 L/min		
Steering pump	1 gear pump		
Maximum oil flow	22.8 L/min		
Hydraulic Motors			
Travel	1 variable displacement axial piston motor		
Swing	1 axial piston motor		
Relief Valve Settings			
Implement circuit	34.3 MPa		
Swing circuit	33.4 MPa		
Travel circuit	35.3 MPa		
Pilot circuit	4.0 MPa		
Power boost	36.3 MPa		
Hydraulic Cylinders			
ZX150W-7			
	Quantity	Bore	Rod diameter
Boom (Monoblock boom)	2	105 mm	70 mm
Boom (2-Piece boom)	2	105 mm	75 mm
Arm	1	115 mm	80 mm
Bucket	1	100 mm	70 mm
Positioning (2-Piece boom)	1	145 mm	90 mm
ZX155W-7			
	Quantity	Bore	Rod diameter
Boom (2-Piece boom)	2	105 mm	75 mm
Arm	1	115 mm	80 mm
Bucket	1	100 mm	70 mm
Positioning (2-Piece boom)	1	145 mm	90 mm

UPPERSTRUCTURE	
Revolving Frame	
D-section frame for resistance to deformation.	
Swing Device	
Axial piston motor with planetary reduction gear is bathed in oil. Swing circle is singlerow. Swing parking brake is spring-set/hydraulic-released disc type.	
Swing speed	11.9 min ⁻¹
Swing torque	33 kNm

UNDERCARRIAGE	
Tracks	
Wheeled type undercarriage. The frame is of welded, stress-relieved structure.	
Travel Device	
Drive system: 2 speed power shift transmission and variable displacement axial piston type travel motor.	
Travel speeds (forward and reverse)	High : 35 km/h
	Low : 8.8 km/h
	Creeper : 2.2 km/h
Maximum traction force	102 kN
Gradeability	70% (35 degree) continuous
Min. turning radius	6 800 mm
Axle	
All-wheel drive. The front axle can be locked hydraulically in any position. Oscillating Front Axle ... ± 9°	
Brakes system	
Maintenance free wet-disc brakes on axle are standard. Fully hydraulic service brake system	

SERVICE REFILL CAPACITIES	
Fuel tank	250 L
Engine coolant	22.7 L
Engine oil	14.0 L
Swing device	3.2 L
Transmission	2.5 L
Hydraulic system	200 L
Hydraulic oil tank	88.0 L
DEF/AdBlue® tank	26.0 L
Front differential gear (STD axle)	9.1 L
Rear differential gear (STD axle)	11.8 L
Hub reduction gear	
Front axle (STD axle)	2 x 2.5 L
Rear axle (STD axle)	2 x 2.5 L

ENVIRONMENT		
Engine Emissions	EU Stage V	
Sounds Level		
	ZX150W-7	ZX155W-7
Sound level in cab according to ISO 6396 : 2008	LpA 72 dB(A)	LpA 71 dB(A)
External sound level according to ISO 6395 : 2008	LwA 100 dB(A)	LwA 100 dB(A)
Air Conditioning System		
The air conditioning system contains fluorinated greenhouse gases. Refrigerant type:HFC-1234yf, GWP:0.501, Amount:0.70 kg, CO ₂ e:0.00035 ton		

WEIGHTS

Operating Weight

Arm length (m)	Stabilization	ZX150W-7		ZX155W-7
		Monoblock	2-Piece	2-Piece
		kg	kg	kg
2.52	Rear blade	15 600	16 100	16 200
	Rear outrigger	15 900	16 400	16 400
	Outrigger and blade	16 700	17 100	17 200
	Front and rear outrigger	16 900	17 400	17 500

ZX150W-7 : Including 0.52 m³ (ISO 7451 : 2007 heaped), bucket weight (410 kg) and counterweight (3 100 kg).

ZX155W-7 : Including 0.52 m³ (ISO 7451 : 2007 heaped), bucket weight (410 kg) and counterweight (3 200 kg).

BUCKET AND ARM DIGGING FORCE

Unit: kN

Arm length	2.52 m
Bucket digging force ISO 6015 : 2006	104
Arm crowd force ISO 6015 : 2006	69

Calculated value at power boost

BACKHOE ATTACHMENTS

Bucket	Capacity (m ³)	Width (mm)		No. of teeth	Weight (kg)	Recommendation
	ISO7451: 2007 heaped	Without side cutters	With side cutters			Arm 2.52 m
Hoe bucket	0.45	800	920	5	390	◎
	0.52	890	1 010	5	410	◎
	0.59	960	1 070	5	430	○


◎ Suitable for materials with density of 2 000 kg/m³ or less

○ Suitable for materials with density of 1 600 kg/m³ or less

SPECIFICATIONS

ZX150W-7


WORKING RANGES: MONOBLOCK BOOM

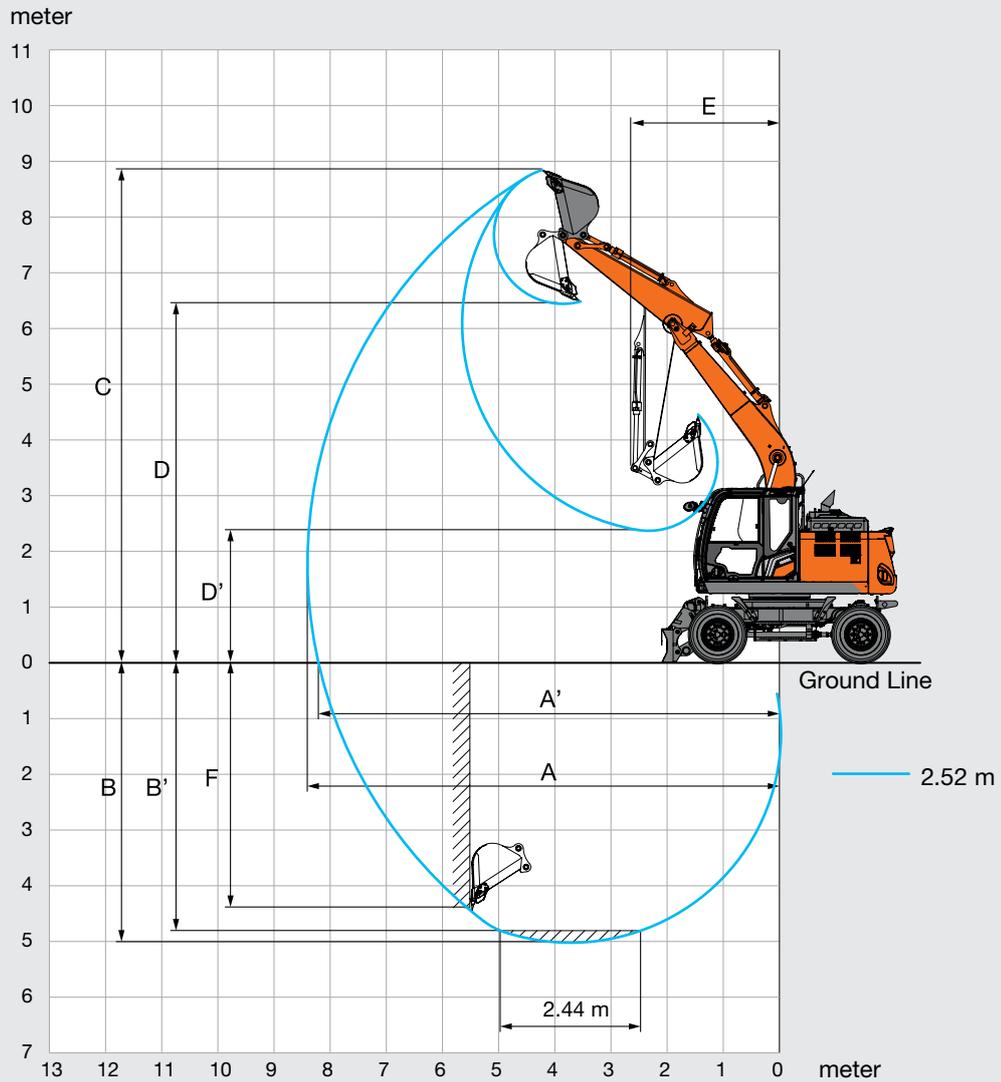

Unit: mm

	ZX150W-7
Front type	Monoblock boom
Arm length	2.52 m
A Max. digging reach	8 410
A' Max. digging reach (on ground)	8 210
B Max. digging depth	5 030
B' Max. digging depth for 2.44 m level	4 830
C Max. cutting height	8 850
D Max. dumping height	6 440
D' Min. dumping height	2 370
E Min. swing radius	2 650
F Max. vertical wall digging depth	4 520

WORKING RANGES: 2-PIECE BOOM

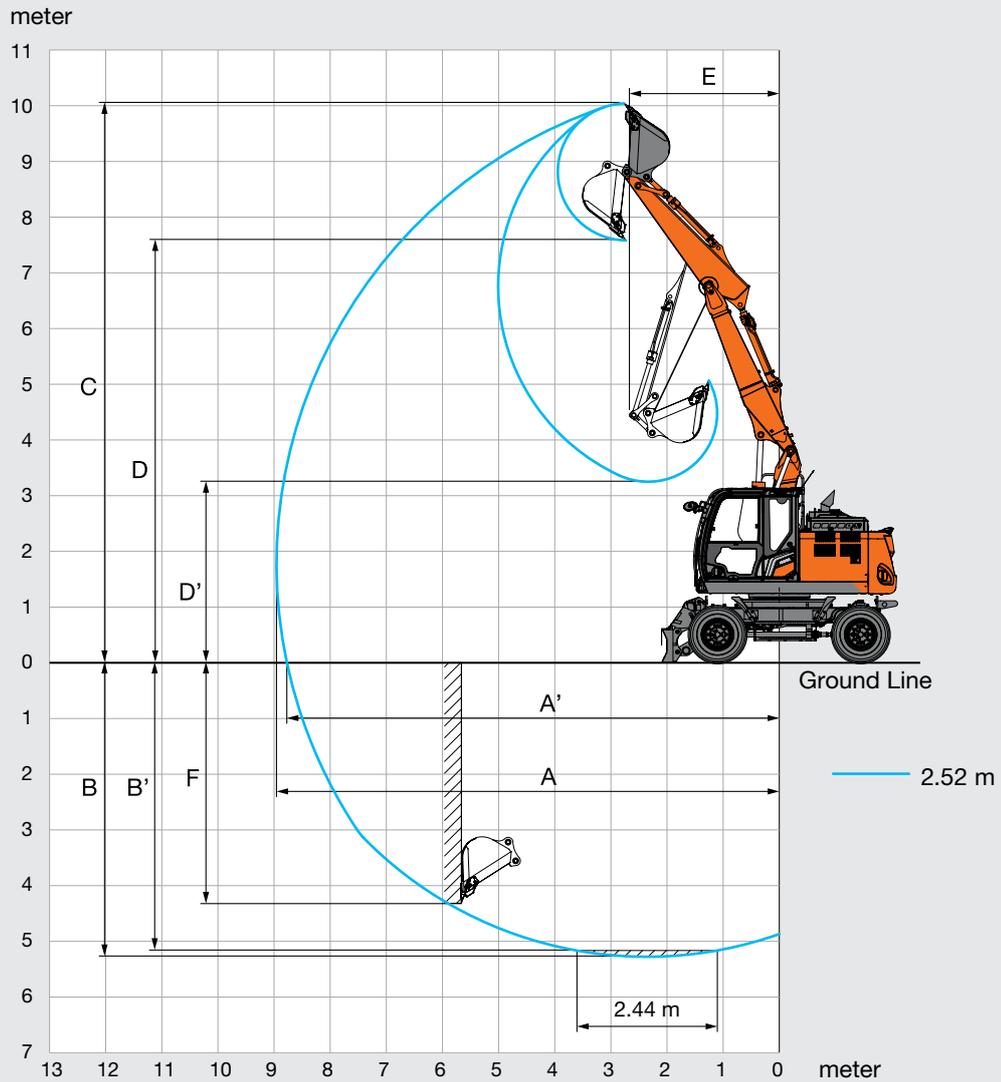

Unit: mm


	ZX150W-7
Front type	2-Piece boom
Arm length	2.52 m
A Max. digging reach	8 960
A' Max. digging reach (on ground)	8 780
B Max. digging depth	5 290
B' Max. digging depth for 2.44 m level	5 180
C Max. cutting height	10 040
D Max. dumping height	7 570
D' Min. dumping height	3 250
E Min. swing radius	2 670
F Max. vertical wall digging depth	4 330

SPECIFICATIONS


ZX150W-7

DIMENSIONS


MONOBLOCK BOOM

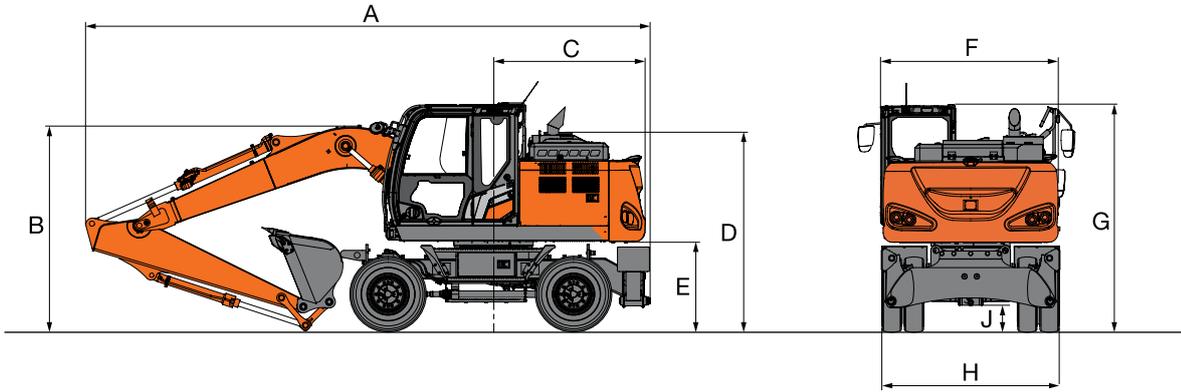


2-PIECE BOOM

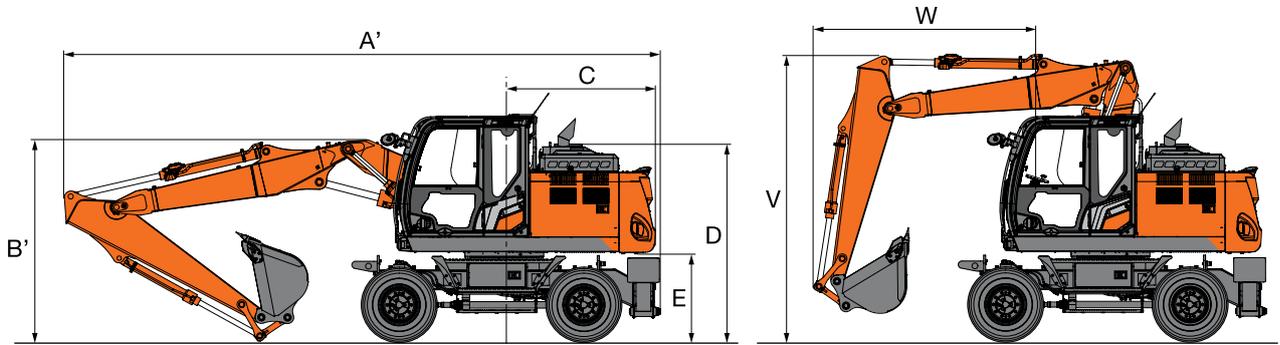


FRONT BLADE AND REAR OUTRIGGER

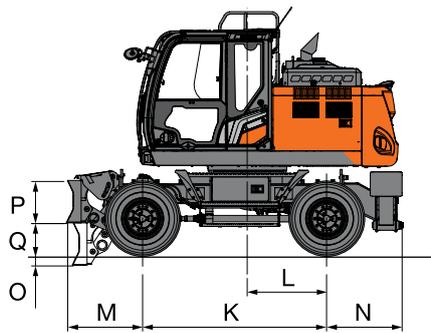

FRONT AND REAR OUTRIGGER

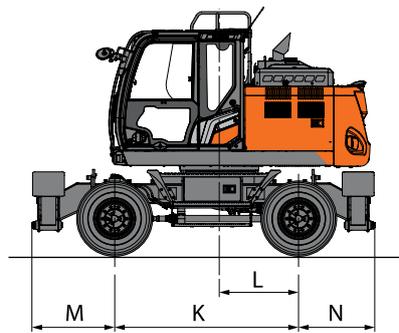

REAR BLADE

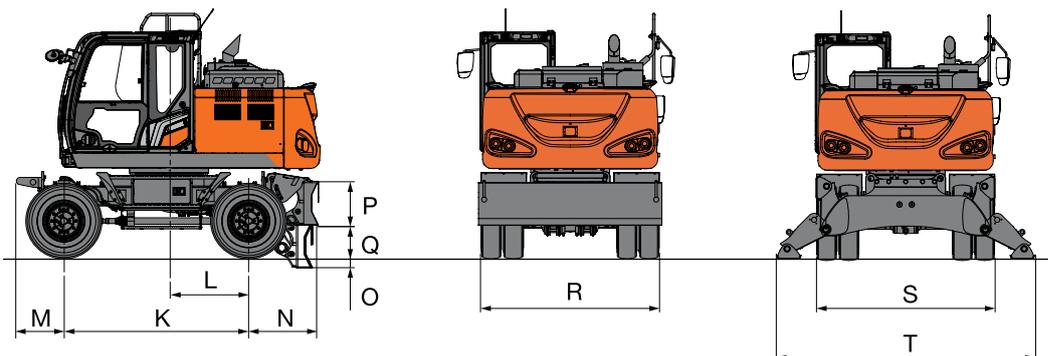

DIMENSIONS

Unit: mm

		ZX150W-7				
	Stabilizer type	Rear BL	Rear O/R	Front BL Rear O/R	Front O/R Rear BL	Front and Rear O/R
A	Overall length (with monoblock boom)					
	Arm 2.52 m	7 700	7 760	7 760	7 700	7 760
A'	Overall length (with 2-piece boom)					
	Arm 2.52 m	8 170	8 230	8 230	8 170	8 230
B	Overall height of boom (with monoblock boom)					
	Arm 2.52 m	2 950	2 950	2 950	2 950	2 950
B'	Overall height of boom (with 2-piece boom)					
	Arm 2.52 m	3 110	3 110	3 110	3 110	3 110
C	Rear-end swing radius	2 120	2 120	2 120	2 120	2 120
D	Engine cover height	2 710	2 710	2 710	2 710	2 710
E	Counterweight clearance	1 215	1 215	1 215	1 215	1 215
F	Overall width of upper structure	2 480	2 480	2 480	2 480	2 480
G	Overall height of cab	3 150	3 150	3 150	3 150	3 150
H	Overall width of tires	2 530	2 530	2 530	2 530	2 530
J	Min. ground clearance	300	320	300	300	320
K	Wheel base	2 550	2 550	2 550	2 550	2 550
L	Swing-center to rear axle	1 100	1 100	1 100	1 100	1 100
M	Front overhang	655	655	1 055	1 150	1 150
N	Rear overhang	965	1 060	1 060	965	1 060
O	Max. blade lower	145	–	145	145	–
P	Blade height	590	–	590	590	–
Q	Max. blade raise	445	–	445	445	–
R	Overall blade width	2 530	–	2 530	2 530	–
S	Overall width O/R retract	–	2 470	2 470	2 470	2 470
T	Overall width O/R extend	–	3 380	3 380	3 380	3 380
V	Overall boom height (traveling) (for 2-Piece boom only)					
	Arm 2.52 m	4 000	4 000	4 000	4 000	4 000
W	Front overhang (traveling) (for 2-Piece boom only)					
	Arm 2.52 m	3 090	3 090	3 090	3 090	3 090


Overall machine width is the largest value of either F, H, R or S.

Transportation dimensions are A (A'), B (B'), and the largest value of either F, H, R or S.

SPECIFICATIONS

ZX155W-7

WORKING RANGES: 2-PIECE BOOM

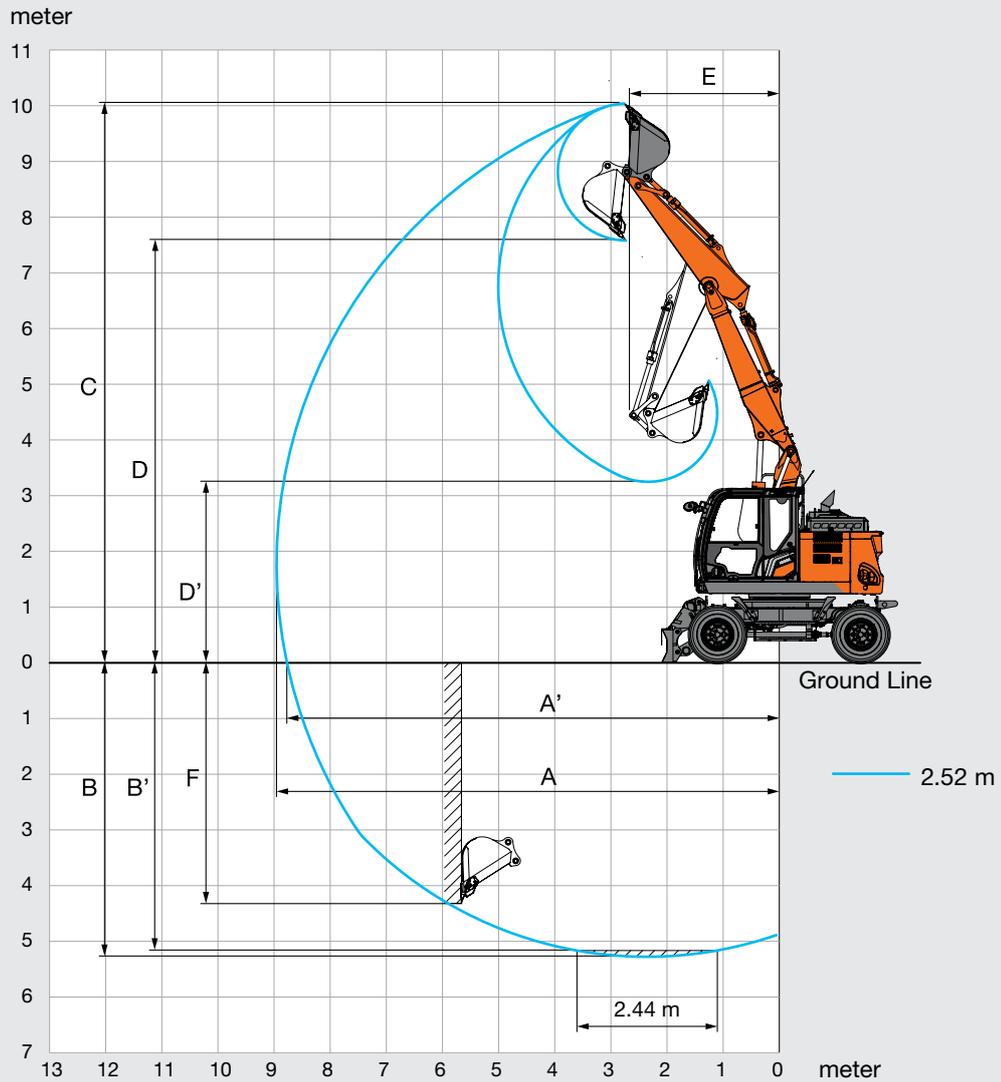

Unit: mm



	ZX155W-7
Front type	2-Piece boom
Arm length	2.52 m
A Max. digging reach	8 960
A' Max. digging reach (on ground)	8 780
B Max. digging depth	5 290
B' Max. digging depth for 2.44 m level	5 180
C Max. cutting height	10 040
D Max. dumping height	7 570
D' Min. dumping height	3 250
E Min. swing radius	2 670
F Max. vertical wall digging depth	4 330

SPECIFICATIONS


ZX155W-7

DIMENSIONS


2-PIECE BOOM

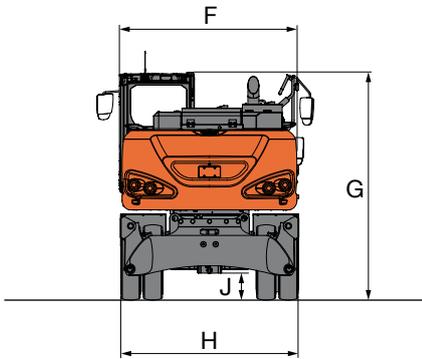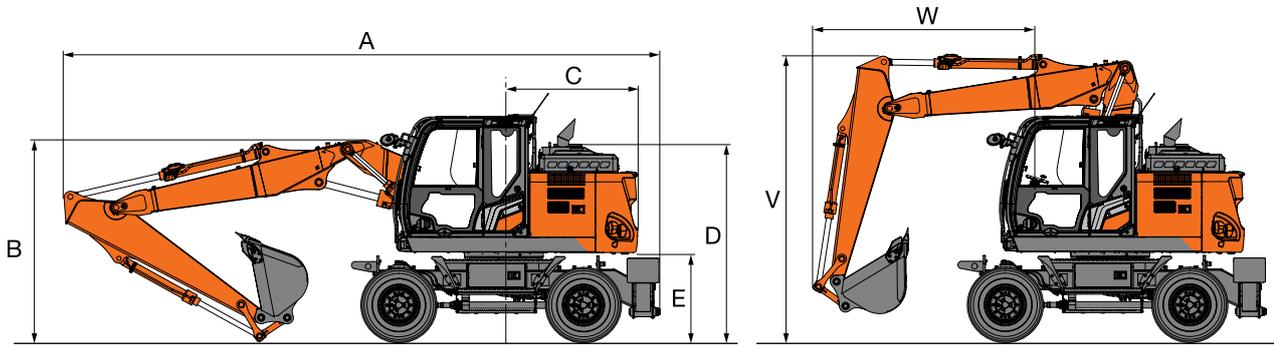


FRONT BLADE AND REAR OUTRIGGER

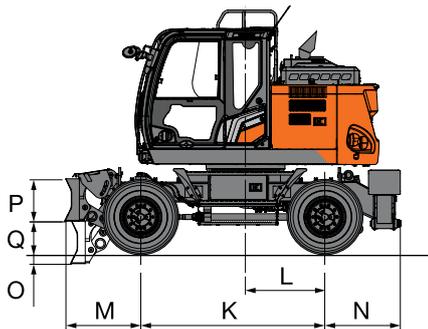

FRONT AND REAR OUTRIGGER

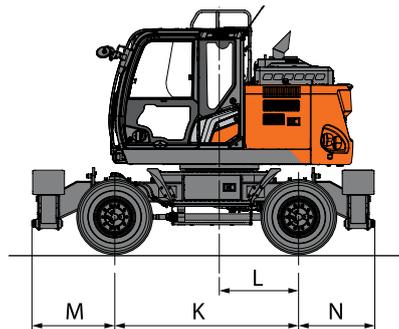

REAR BLADE

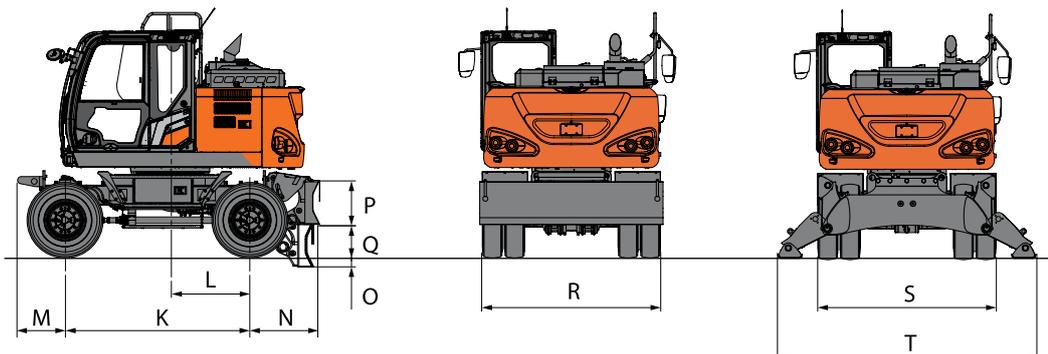

DIMENSIONS

Unit: mm

		ZX155W-7				
	Stabilizer type	Rear BL	Rear O/R	Front BL Rear O/R	Front O/R Rear BL	Front and Rear O/R
A	Overall length (with 2-piece boom)					
	Arm 2.52 m	8 170	8 230	8 230	8 170	8 230
B	Overall height of boom (with 2-piece boom)					
	Arm 2.52 m	3 110	3 110	3 110	3 110	3 110
C	Rear-end swing radius	1 850	1 850	1 850	1 850	1 850
D	Engine cover height	2 710	2 710	2 710	2 710	2 710
E	Counterweight clearance	1 215	1 215	1 215	1 215	1 215
F	Overall width of upper structure	2 480	2 480	2 480	2 480	2 480
G	Overall height of cab	3 150	3 150	3 150	3 150	3 150
H	Overall width of tires	2 530	2 530	2 530	2 530	2 530
J	Min. ground clearance	300	320	300	300	320
K	Wheel base	2 550	2 550	2 550	2 550	2 550
L	Swing-center to rear axle	1 100	1 100	1 100	1 100	1 100
M	Front overhang	655	655	1 055	1 150	1 150
N	Rear overhang	965	1 060	1 060	965	1 060
O	Max. blade lower	145	–	145	145	–
P	Blade height	590	–	590	590	–
Q	Max. blade raise	445	–	445	445	–
R	Overall blade width	2 530	–	2 530	2 530	–
S	Overall width O/R retract	–	2 470	2 470	2 470	2 470
T	Overall width O/R extend	–	3 380	3 380	3 380	3 380
V	Overall boom height (traveling) (for 2-Piece boom only)					
	Arm 2.52 m	4 000	4 000	4 000	4 000	4 000
W	Front overhang (traveling) (for 2-Piece boom only)					
	Arm 2.52 m	3 090	3 090	3 090	3 090	3 090


Overall machine width is the largest value of either F, H, R or S.

Transportation dimensions are A, B, and the largest value of either F, H, R or S.

MACHINE CAPACITIES

ZX150W-7

- Notes:
1. Ratings are based on ISO 10567 : 2007.
 2. Machine capacity does not exceed 75% of tipping load with the machine on firm, level ground or 87% full hydraulic capacity.
 3. The load point is the center-line of the bucket pivot mounting pin on the arm.
 4. *Indicates load limited by hydraulic capacity.
 5. Each value with Rear blade up over the Front-axle side and each value with Rear blade down over the Rear-axle side respectively, and value in optimal position with positioning cylinder.
 6. 0 m = Ground.



- A: Load radius
B: Load point height
C: Machine capacity

For machine capacities, subtract installed attachment and quick hitch weight from machine capacities.

To determine lifting capacities, apply "Rating over-side or 360 degrees" machine capacities from the table and deduct weight of installed attachment and quick hitch.

Optional feature may affect machine performance.

ZX150W-7 MONOBLOCK BOOM, ARM 2.52 M, 3 100 KG COUNTERWEIGHT

Rating over-front or rear Rating over-side or 360 degrees Unit : kg

Load point height (m)	Stabilization	Load radius										At max. reach		meter								
		1.5 m		3.0 m		4.5 m		6.0 m		7.5 m												
6.0 m	Rear blade up (over front)					*3 520	*3 520							*2 410	*2 410	5.73						
	Rear blade down (over rear)					*3 520	*3 520							*2 410	*2 410							
	Rear outrigger down (over rear)					*3 520	*3 520							*2 410	*2 410							
	Front outrigger and rear blade down (over rear)					*3 520	*3 520							*2 410	*2 410							
	Front blade and rear outrigger down (over rear)					*3 520	*3 520							*2 410	*2 410							
	4 outrigger down (over rear)					*3 520	*3 520							*2 410	*2 410							
4.5 m	Rear blade up (over front)					*3 910	3 760	*3 690	2 410					*2 280	2 050	6.61						
	Rear blade down (over rear)					*3 910	*3 910	*3 690	2 790					*2 280	*2 280							
	Rear outrigger down (over rear)					*3 910	*3 910	*3 690	3 330					*2 280	*2 280							
	Front outrigger and rear blade down (over rear)					*3 910	*3 910	*3 690	*3 690					*2 280	*2 280							
	Front blade and rear outrigger down (over rear)					*3 910	*3 910	*3 690	*3 690					*2 280	*2 280							
	4 outrigger down (over rear)					*3 910	*3 910	*3 690	*3 690					*2 280	*2 280							
3.0 m	Rear blade up (over front)						*7 080	6 410	*4 850	3 540	3 940	2 330			*2 300	1 800	7.07					
	Rear blade down (over rear)						*7 080	*7 080	*4 850	4 130	*4 020	2 700			*2 300	2 100						
	Rear outrigger down (over rear)						*7 080	*7 080	*4 850	*4 850	*4 020	3 250			*2 300	*2 300						
	Front outrigger and rear blade down (over rear)						*7 080	*7 080	*4 850	*4 850	*4 020	*4 020			*2 300	*2 300						
	Front blade and rear outrigger down (over rear)						*7 080	*7 080	*4 850	*4 850	*4 020	*4 020			*2 300	*2 300						
	4 outrigger down (over rear)						*7 080	*7 080	*4 850	*4 850	*4 020	*4 020			*2 300	*2 300						
1.5 m	Rear blade up (over front)								*5 860	3 310	3 830	2 230			*2 450	1 720	7.17					
	Rear blade down (over rear)								*5 860	3 890	*4 440	2 600			*2 450	2 010						
	Rear outrigger down (over rear)								*5 860	4 740	*4 440	3 140			*2 450	2 430						
	Front outrigger and rear blade down (over rear)								*5 860	*5 860	*4 440	3 980			*2 450	*2 450						
	Front blade and rear outrigger down (over rear)								*5 860	*5 860	*4 440	4 110			*2 450	*2 450						
	4 outrigger down (over rear)								*5 860	*5 860	*4 440	*4 440			*2 450	*2 450						
0 m (Ground)	Rear blade up (over front)									*6 270	5 570	5 710	3 160	3 750	2 150		*2 790	1 770	6.94			
	Rear blade down (over rear)									*6 270	*6 270	*6 410	3 730	*4 690	2 520		*2 790	2 070				
	Rear outrigger down (over rear)									*6 270	*6 270	*6 410	4 580	*4 690	3 060		*2 790	2 510				
	Front outrigger and rear blade down (over rear)									*6 270	*6 270	*6 410	5 930	*4 690	3 900		*2 790	*2 790				
	Front blade and rear outrigger down (over rear)									*6 270	*6 270	*6 410	6 150	*4 690	4 030		*2 790	*2 790				
	4 outrigger down (over rear)									*6 270	*6 270	*6 410	*6 410	*4 690	*4 690		*2 790	*2 790				
-1.5 m	Rear blade up (over front)									*5 230	*5 230	*9 410	5 570	5 660	3 120	3 730	2 140		3 460	1 990	6.35	
	Rear blade down (over rear)									*5 230	*5 230	*9 410	6 760	*6 280	3 690	*4 470	2 510		*3 480	2 340		
	Rear outrigger down (over rear)									*5 230	*5 230	*9 410	8 610	*6 280	4 530	*4 470	3 040		*3 480	2 830		
	Front outrigger and rear blade down (over rear)									*5 230	*5 230	*9 410	*9 410	*6 280	5 880	*4 470	3 880		*3 480	*3 480		
	Front blade and rear outrigger down (over rear)									*5 230	*5 230	*9 410	*9 410	*6 280	6 100	*4 470	4 010		*3 480	*3 480		
	4 outrigger down (over rear)									*5 230	*5 230	*9 410	*9 410	*6 280	*6 280	*4 470	*4 470		*3 480	*3 480		
-3.0 m	Rear blade up (over front)																			*4 070	2 610	5.26
	Rear blade down (over rear)																			*4 070	3 060	
	Rear outrigger down (over rear)																			*4 070	3 720	
	Front outrigger and rear blade down (over rear)																			*4 070	*4 070	
	Front blade and rear outrigger down (over rear)																			*4 070	*4 070	
	4 outrigger down (over rear)																			*4 070	*4 070	

ZX150W-7 2-PIECE BOOM, ARM 2.52 M, 3 100 KG COUNTERWEIGHT


 Rating over-front or rear
  Rating over-side or 360 degrees Unit : kg

Load point height (m)	Stabilization	Load radius										At max. reach				
		1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		meter				
																
7.5 m	Rear blade up (over front)					*3 790	*3 790							*2 810	*2 810	5.04
	Rear blade down (over rear)					*3 790	*3 790							*2 810	*2 810	
	Rear outrigger down (over rear)					*3 790	*3 790							*2 810	*2 810	
	Front outrigger and rear blade down (over rear)					*3 790	*3 790							*2 810	*2 810	
	Front blade and rear outrigger down (over rear)					*3 790	*3 790							*2 810	*2 810	
	4 outrigger down (over rear)					*3 790	*3 790							*2 810	*2 810	
6.0 m	Rear blade up (over front)					*3 710	*3 710	*3 460	2 430					*2 410	2 130	6.41
	Rear blade down (over rear)					*3 710	*3 710	*3 460	2 820					*2 410	*2 410	
	Rear outrigger down (over rear)					*3 710	*3 710	*3 460	3 360					*2 410	*2 410	
	Front outrigger and rear blade down (over rear)					*3 710	*3 710	*3 460	*3 460					*2 410	*2 410	
	Front blade and rear outrigger down (over rear)					*3 710	*3 710	*3 460	*3 460					*2 410	*2 410	
	4 outrigger down (over rear)					*3 710	*3 710	*3 460	*3 460					*2 410	*2 410	
4.5 m	Rear blade up (over front)			*4 330	*4 330	*4 240	*3 760	*3 690	2 490					*2 280	1 730	7.21
	Rear blade down (over rear)			*4 330	*4 330	*4 240	*4 240	*3 690	2 860					*2 280	2 020	
	Rear outrigger down (over rear)			*4 330	*4 330	*4 240	*4 240	*3 690	3 350					*2 280	*2 280	
	Front outrigger and rear blade down (over rear)			*4 330	*4 330	*4 240	*4 240	*3 690	*3 690					*2 280	*2 280	
	Front blade and rear outrigger down (over rear)			*4 330	*4 330	*4 240	*4 240	*3 690	*3 690					*2 280	*2 280	
	4 outrigger down (over rear)			*4 330	*4 330	*4 240	*4 240	*3 690	*3 690					*2 280	*2 280	
3.0 m	Rear blade up (over front)			*6 820	6 480	*5 170	3 660	*3 920	2 470	2 760	1 590			*2 270	1 540	7.62
	Rear blade down (over rear)			*6 820	*6 820	*5 170	*4 180	*4 050	2 840	*2 920	1 870			*2 270	1 810	
	Rear outrigger down (over rear)			*6 820	*6 820	*5 170	4 930	*4 050	3 320	*2 920	2 270			*2 270	2 200	
	Front outrigger and rear blade down (over rear)			*6 820	*6 820	*5 170	*5 170	*4 050	4 040	*2 920	2 870			*2 270	*2 270	
	Front blade and rear outrigger down (over rear)			*6 820	*6 820	*5 170	*5 170	*4 050	*4 050	*2 920	*2 920			*2 270	*2 270	
	4 outrigger down (over rear)			*6 820	*6 820	*5 170	*5 170	*4 050	*4 050	*2 920	*2 920			*2 270	*2 270	
1.5 m	Rear blade up (over front)	*6 350	*6 350	*8 180	6 300	5 790	3 620	3 900	2 390	2 730	1 560			*2 380	1 470	7.72
	Rear blade down (over rear)	*6 350	*6 350	*8 180	*7 340	*5 990	4 130	*4 410	2 770	*3 550	1 840			*2 380	1 740	
	Rear outrigger down (over rear)	*6 350	*6 350	*8 180	*8 180	*5 990	4 860	*4 410	3 320	*3 550	2 230			*2 380	2 120	
	Front outrigger and rear blade down (over rear)	*6 350	*6 350	*8 180	*8 180	*5 990	*5 950	*4 410	*4 020	*3 550	2 840			*2 380	*2 380	
	Front blade and rear outrigger down (over rear)	*6 350	*6 350	*8 180	*8 180	*5 990	*5 950	*4 410	*4 120	*3 550	2 930			*2 380	*2 380	
	4 outrigger down (over rear)	*6 350	*6 350	*8 180	*8 180	*5 990	*5 990	*4 410	*4 410	*3 550	3 400			*2 380	*2 380	
0 m (Ground)	Rear blade up (over front)	*8 050	*8 050	*9 470	6 360	*5 820	3 590	3 880	2 260	2 680	1 510			*2 630	1 500	7.51
	Rear blade down (over rear)	*8 050	*8 050	*9 470	7 430	*6 250	4 190	*4 550	2 640	*2 720	1 780			*2 630	1 780	
	Rear outrigger down (over rear)	*8 050	*8 050	*9 470	8 950	*6 250	4 920	*4 550	3 190	*2 720	2 180			*2 630	2 180	
	Front outrigger and rear blade down (over rear)	*8 050	*8 050	*9 470	*9 470	*6 250	5 970	*4 550	4 030	*2 720	*2 720			*2 630	*2 630	
	Front blade and rear outrigger down (over rear)	*8 050	*8 050	*9 470	*9 470	*6 250	6 130	*4 550	4 160	*2 720	*2 720			*2 630	*2 630	
	4 outrigger down (over rear)	*8 050	*8 050	*9 470	*9 470	*6 250	*6 250	*4 550	*4 550	*2 720	*2 720			*2 630	*2 630	
-1.5 m	Rear blade up (over front)	*12 350	*12 350	*10 070	6 110	6 020	3 390	3 760	2 130					2 970	1 670	6.97
	Rear blade down (over rear)	*12 350	*12 350	*10 070	7 350	*6 350	3 990	*4 620	2 510					*3 120	1 970	
	Rear outrigger down (over rear)	*12 350	*12 350	*10 070	9 230	*6 350	4 860	*4 620	3 050					*3 120	2 410	
	Front outrigger and rear blade down (over rear)	*12 350	*12 350	*10 070	*10 070	*6 350	*6 160	*4 620	3 900					*3 120	3 090	
	Front blade and rear outrigger down (over rear)	*12 350	*12 350	*10 070	*10 070	*6 350	6 270	*4 620	4 030					*3 120	*3 120	
	4 outrigger down (over rear)	*12 350	*12 350	*10 070	*10 070	*6 350	*6 350	*4 620	*4 620					*3 120	*3 120	
-3.0 m	Rear blade up (over front)	*18 480	*18 480	*10 380	5 950	5 800	3 190							*3 860	2 250	5.69
	Rear blade down (over rear)	*18 480	*18 480	*10 380	7 190	*6 180	3 780							*3 860	2 660	
	Rear outrigger down (over rear)	*18 480	*18 480	*10 380	9 110	*6 180	4 640							*3 860	3 250	
	Front outrigger and rear blade down (over rear)	*18 480	*18 480	*10 380	*10 380	*6 180	6 010							*3 860	*3 860	
	Front blade and rear outrigger down (over rear)	*18 480	*18 480	*10 380	*10 380	*6 180	*6 180							*3 860	*3 860	
	4 outrigger down (over rear)	*18 480	*18 480	*10 380	*10 380	*6 180	*6 180							*3 860	*3 860	

MACHINE CAPACITIES

ZX155W-7

- Notes:
1. Ratings are based on ISO 10567 : 2007.
 2. Machine capacity does not exceed 75% of tipping load with the machine on firm, level ground or 87% full hydraulic capacity.
 3. The load point is the center-line of the bucket pivot mounting pin on the arm.
 4. *Indicates load limited by hydraulic capacity.
 5. Each value with Rear blade up over the Front-axle side and each value with Rear blade down over the Rear-axle side respectively, and value in optimal position with positioning cylinder.
 6. 0 m = Ground.



- A: Load radius
B: Load point height
C: Machine capacity

For machine capacities, subtract installed attachment and quick hitch weight from machine capacities.

To determine lifting capacities, apply "Rating over-side or 360 degrees" machine capacities from the table and deduct weight of installed attachment and quick hitch.

Optional feature may affect machine performance.

ZX155W-7 2-PIECE BOOM, ARM 2.52 M, 3 200KG COUNTERWEIGHT

Rating over-front or rear Rating over-side or 360 degrees Unit : kg

Load point height (m)	Stabilization	Load radius										At max. reach		meter		
		1.5 m		3.0 m		4.5 m		6.0 m		7.5 m						
7.5 m	Rear blade up (over front)					*3 790	3 760							*2 810	*2 810	5.04
	Rear blade down (over rear)					*3 790	*3 790							*2 810	*2 810	
	Rear outrigger down (over rear)					*3 790	*3 790							*2 810	*2 810	
	Front outrigger and rear blade down (over rear)					*3 790	*3 790							*2 810	*2 810	
	Front blade and rear outrigger down (over rear)					*3 790	*3 790							*2 810	*2 810	
	4 outrigger down (over rear)					*3 790	*3 790							*2 810	*2 810	
6.0 m	Rear blade up (over front)					*3 710	*3 710	*3 460	2 370					*2 410	2 080	6.41
	Rear blade down (over rear)					*3 710	*3 710	*3 460	2 760					*2 410	*2 410	
	Rear outrigger down (over rear)					*3 710	*3 710	*3 460	3 310					*2 410	*2 410	
	Front outrigger and rear blade down (over rear)					*3 710	*3 710	*3 460	*3 460					*2 410	*2 410	
	Front blade and rear outrigger down (over rear)					*3 710	*3 710	*3 460	*3 460					*2 410	*2 410	
	4 outrigger down (over rear)					*3 710	*3 710	*3 460	*3 460					*2 410	*2 410	
4.5 m	Rear blade up (over front)			*4 330	*4 330	*4 240	3 680	*3 690	2 430					*2 280	1 680	7.21
	Rear blade down (over rear)			*4 330	*4 330	*4 240	4 220	*3 690	2 810					*2 280	1 980	
	Rear outrigger down (over rear)			*4 330	*4 330	*4 240	*4 240	*3 690	3 310					*2 280	*2 280	
	Front outrigger and rear blade down (over rear)			*4 330	*4 330	*4 240	*4 240	*3 690	*3 690					*2 280	*2 280	
	Front blade and rear outrigger down (over rear)			*4 330	*4 330	*4 240	*4 240	*3 690	*3 690					*2 280	*2 280	
	4 outrigger down (over rear)			*4 330	*4 330	*4 240	*4 240	*3 690	*3 690					*2 280	*2 280	
3.0 m	Rear blade up (over front)			*6 820	6 280	*5 170	3 590	3 870	2 420	2 720	1 550			*2 270	1 490	7.62
	Rear blade down (over rear)			*6 820	*6 820	*5 170	*4 110	*4 050	2 800	*2 920	1 830			*2 270	1 770	
	Rear outrigger down (over rear)			*6 820	*6 820	*5 170	4 860	*4 050	*3 270	*2 920	2 230			*2 270	2 160	
	Front outrigger and rear blade down (over rear)			*6 820	*6 820	*5 170	*5 170	*4 050	3 990	*2 920	2 830			*2 270	*2 270	
	Front blade and rear outrigger down (over rear)			*6 820	*6 820	*5 170	*5 170	*4 050	*4 050	*2 920	*2 920			*2 270	*2 270	
	4 outrigger down (over rear)			*6 820	*6 820	*5 170	*5 170	*4 050	*4 050	*2 920	*2 920			*2 270	*2 270	
1.5 m	Rear blade up (over front)	*6 350	*6 350	*8 180	6 180	5 730	3 550	3 850	2 340	2 690	1 510			*2 380	1 430	7.72
	Rear blade down (over rear)	*6 350	*6 350	*8 180	7 220	*5 990	4 060	*4 410	2 720	*3 550	1 790			*2 380	1 690	
	Rear outrigger down (over rear)	*6 350	*6 350	*8 180	*8 180	*5 990	4 800	*4 410	3 260	*3 550	2 190			*2 380	2 080	
	Front outrigger and rear blade down (over rear)	*6 350	*6 350	*8 180	*8 180	*5 990	5 890	*4 410	3 970	*3 550	2 800			*2 380	*2 380	
	Front blade and rear outrigger down (over rear)	*6 350	*6 350	*8 180	*8 180	*5 990	*5 990	*4 410	4 080	*3 550	2 890			*2 380	*2 380	
	4 outrigger down (over rear)	*6 350	*6 350	*8 180	*8 180	*5 990	*5 990	*4 410	*4 410	*3 550	3 360			*2 380	*2 380	
0 m (Ground)	Rear blade up (over front)	*8 050	*8 050	*9 470	*6 260	5 760	3 510	3 830	2 200	2 640	1 460			*2 630	1 460	7.51
	Rear blade down (over rear)	*8 050	*8 050	*9 470	7 300	*6 250	4 110	*4 550	2 580	*2 720	1 740			*2 630	1 740	
	Rear outrigger down (over rear)	*8 050	*8 050	*9 470	*8 840	*6 250	4 850	*4 550	3 140	*2 720	2 140			*2 630	2 130	
	Front outrigger and rear blade down (over rear)	*8 050	*8 050	*9 470	*9 470	*6 250	5 910	*4 550	3 970	*2 720	*2 720			*2 630	*2 630	
	Front blade and rear outrigger down (over rear)	*8 050	*8 050	*9 470	*9 470	*6 250	6 070	*4 550	4 100	*2 720	*2 720			*2 630	*2 630	
	4 outrigger down (over rear)	*8 050	*8 050	*9 470	*9 470	*6 250	*6 250	*4 550	*4 550	*2 720	*2 720			*2 630	*2 630	
-1.5 m	Rear blade up (over front)	*12 350	*12 350	*10 070	5 970	5 940	3 310	3 700	2 070					2 920	1 620	6.97
	Rear blade down (over rear)	*12 350	*12 350	*10 070	7 210	*6 350	3 910	*4 620	2 450					*3 120	1 930	
	Rear outrigger down (over rear)	*12 350	*12 350	*10 070	9 120	*6 350	4 780	*4 620	3 000					*3 120	2 370	
	Front outrigger and rear blade down (over rear)	*12 350	*12 350	*10 070	*10 070	*6 350	6 110	*4 620	3 850					*3 120	3 050	
	Front blade and rear outrigger down (over rear)	*12 350	*12 350	*10 070	*10 070	*6 350	6 230	*4 620	3 980					*3 120	*3 120	
	4 outrigger down (over rear)	*12 350	*12 350	*10 070	*10 070	*6 350	*6 350	*4 620	*4 620					*3 120	*3 120	
-3.0 m	Rear blade up (over front)	*18 480	*18 480	*10 380	5 810	5 720	3 110							*3 860	2 190	5.69
	Rear blade down (over rear)	*18 480	*18 480	*10 380	7 050	*6 180	3 700							*3 860	2 600	
	Rear outrigger down (over rear)	*18 480	*18 480	*10 380	8 960	*6 180	4 560							*3 860	3 190	
	Front outrigger and rear blade down (over rear)	*18 480	*18 480	*10 380	*10 380	*6 180	5 930							*3 860	*3 860	
	Front blade and rear outrigger down (over rear)	*18 480	*18 480	*10 380	*10 380	*6 180	6 160							*3 860	*3 860	
	4 outrigger down (over rear)	*18 480	*18 480	*10 380	*10 380	*6 180	*6 180							*3 860	*3 860	

EQUIPMENT

● : Standard equipment ○ : Optional equipment - : Not applicable

ENGINE	ZX150W-7	ZX155W-7
Aftertreatment device	●	●
Air cleaner double filters	●	●
Alternator 100 A	●	●
Auto idle system	●	●
Auto shut-down control	●	●
Cartridge-type engine oil filter	●	●
Cartridge-type fuel main filter	●	●
ConSite OIL (sensor)*	●	●
DEF/AdBlue® tank inlet strainer and extension filler	●	●
DEF/AdBlue® tank	●	●
Dry-type air filter with evacuator valve (with air filter restriction indicator)	●	●
Dust-proof indoor net	●	●
ECO/PWR mode control	●	●
Engine oil drain coupler	●	●
Expansion tank	●	●
Fan guard	●	●
Fuel pre-filter with water separator	●	●
Isolation-mounted engine	●	●
Maintenance free pre-cleaner	●	●
Radiator, oil cooler and intercooler	●	●

HYDRAULIC SYSTEM	ZX150W-7	ZX155W-7
Auto power lift	●	●
ConSite OIL (sensor)*	●	●
Control valve with main relief valve	●	●
Extra port for control valve	●	●
High mesh full-flow filter	●	●
Hose rupture valve for arm	●	●
Hose rupture valve for boom	●	●
Pilot filter	●	●
Power boost	●	●
Restriction indicator for full-flow filter	○	○
Shockless valve in pilot circuit	●	●
Steering filter	●	●
Suction filter	●	●
Swing dampener valve	●	●
Variable reliefvalve for breaker and crusher	●	●
Work mode selector	●	●

CAB	ZX150W-7	ZX155W-7
Auto control air conditioner	●	●
AUX function lever (breaker assist)	●	●
Bluetooth® integrated DAB+radio	●	●
Console height adjustment	●	●
Control lever auto-lock	●	●
Cab: All-weather sound suppressed steel cab	●	●
Cab: CRES VII (center pillar reinforced structure) cab	●	●
Cab: OPG top guard Level I (ISO 10262 : 1998) compliant	●	●
Cab: ROPS (ISO 12117-2 : 2008) compliant	●	●
Drink holder with hot and cool function	●	●
Electric double horn	●	●
Engine shut-off switch	●	●
Equipped with reinforced, tinted (green color) glass windows	●	●
Evacuation hammer	●	●
Floor mat	●	●
Footrest	●	●
Front guard: OPG Level II (ISO 10262 : 1998) compliant	○	○
Front window washer	●	●
Glove compartment	●	●
Hands-free calling device	●	●
Hot and cool box	●	●
Intermittent windshield wipers	●	●
Key cylinder light	●	●
Laminated round glass window	○	○
LED room light	●	●
Pilot shut-off lever	●	●
Power outlet 12 V and 24 V	●	●
Push button low idle	●	●
Rear tray	●	●
Retractable seat belt	●	●
Rubber radio antenna	●	●
Seat : air suspension seat with heater	●	●
Seat adjustment part : backrest, armrest, height and angle, slide forward / back	●	●
Seat belt reminder	●	●
Short wrist control levers	●	●
Smartphone holder	●	●
Sunscreen roller type (multi-use front or side and rear window)	●	●
Top guard: OPG Level II (ISO 10262 : 1998) compliant	●	●
Transparent roof with slide curtain	●	●
USB power supply	●	●
Wide view wiper	●	●
Windows on front, upper, lower and left side can be opened	●	●
2 speakers	●	●
4 fluid-filled elastic mounts	●	●
8 inch monitor	●	●

● : Standard equipment ○ : Optional equipment – : Not applicable

MONITOR SYSTEM	ZX150W-7	ZX155W-7
Alarm buzzers: overheat, engine oil pressure, overload, SCR system trouble	●	●
Alarms: overheat, engine warning, engine oil pressure, alternator, minimum fuel level, hydraulic filter restriction, air filter restriction, work mode, overload, SCR system trouble, etc	●	●
Attachment operational information	●	●
Display of meters: Speedometer, Tachometer, Tripmeter, water temperature, hour, fuel rate, clock, DEF/ AdBlue® rate	●	●
Other displays: work mode, auto-idle, glow, rearview monitor, operating conditions, etc	●	●
35 languages selection	●	●

LIGHTS	ZX150W-7	ZX155W-7
Additional boom LED light with cover	○	○
Additional cab roof front LED lights	○	○
Additional cab roof rear LED lights	○	○
Brake lamps	●	●
Clearance lamps	●	●
Hazard lamps	●	●
Headlight LED	●	●
LED lights for camera (side and rear view camera)	○	○
Turn signal lamps	●	●
Working LED lights	●	●

UPPER STRUCTURE	ZX150W-7	ZX155W-7
Aerial Angle (270-degree view camera system)	●	●
Batteries 2 x 12 V	●	●
Battery disconnect switch	●	●
Body top guardrail	●	●
Cab top handhold	●	●
Counterweight 3 100 kg	●	–
Counterweight 3 200 kg	–	●
Fuel level float	●	●
Hydraulic oil level gauge	●	●
Lockable fuel refilling cap	●	●
Lockable machine covers	●	●
Platform handrail	●	●
Rear view mirrors (right and left side)	●	●
Rear view mirrors with heater (right and left side)	○	○
Skid-resistant plates and handrails	●	●
Swing parking brake	●	●
Undercover	●	●

UNDERCARRIAGE	ZX150W-7	ZX155W-7
Automatic transmission control	●	●
Automatic working brake control	●	●
Clamshell bracket	○	○
Cruise control**	●	●
Electric system for trailer	○	○
Front cover	○	○
Front dozer blade + rear outrigger	○	○
Front fender / rear fender	○	○
Front outrigger + rear dozer blade	○	○
Front outrigger + rear outrigger	○	○
Parking brake	●	●
Rear dozer blade	○	○
Rear outrigger	○	○
Reinforced rear dozer blade for trailer towing	○	○
Right toolbox	○	○
Tire spacer	●	●
Tool box: left chassis	●	●
Traction types pattern tires (10.00-20 16PR)	●	●
4 tie down brackets	●	●

FRONT ATTACHMENTS	ZX150W-7	ZX155W-7
Arm tip remote lubrication	●	●
Casted bucket link A	●	●
Centralized lubrication system	●	●
Dirt seal on all bucket pins	●	●
Flanged pin	●	●
HN bushing	●	●
Lower arm reinforcement	○	○
Reinforced link B	●	●
Reinforced resin thrust plate	●	●
WC (tungsten-carbide) thermal spraying	●	●

ATTACHMENTS	ZX150W-7	ZX155W-7
Accessories for 2 speed selector	○	○
Additional pump (40 L/min)	○	○
Assist piping	○	○
Attachment basic piping	●	●
Breaker and crusher piping	●	●
HSB parts for breaker and crusher	●	●
Pilot accumulator	●	●
PTO valve	○	○

MISCELLANEOUS	ZX150W-7	ZX155W-7
ConSite	○	○
Global e-Service	●	●
Onboard information controller	●	●
Standard tool kit	●	●
Travel direction mark on chassis frame	●	●

Standard and optional equipment may vary by country, so please consult authorized dealer for details.

* Engine oil and hydraulic oil monitoring sensor.

**The system detects the pilot pressure and maintains the set speed by maintaining the pilot pressure.

Prior to operating this machine, including satellite communication system, in a country other than a country of its intended use, it may be necessary to make modifications to it so that it complies with the local regulatory standards (including safety standards) and legal requirements of that particular country. Please do not export or operate this machine outside the country of its intended use until such compliance has been confirmed. Please contact your Hitachi dealer in case of questions about compliance.

CablePrice Pty Ltd

www.cableprice.co.nz

Hitachi Construction Machinery Australia

www.hitachicm.com.au

These specifications are subject to change without notice.

Illustrations and photos show the standard models, and may or may not include optional equipment, accessories, and all standard equipment with some differences in color and features. Before use, read and understand the Operator's Manual for proper operation.

KS-EN673AU

00.00 (--/-- ---)

Printed in Australia